

Automotive Grade Surface-Mount Fuses

- ◆ AEC-Q200 Rev.E Qualified
- ◆ IATF16949 Certified





SolidMatrix Platform, QF Series
AirMatrix Platform, QA Series
CMF Platform, QMF Series



Main Control
Power Input

Slave Control
Monitor Lines and
Cell Balance Lines

Battery
Module and BMS
Connection Board

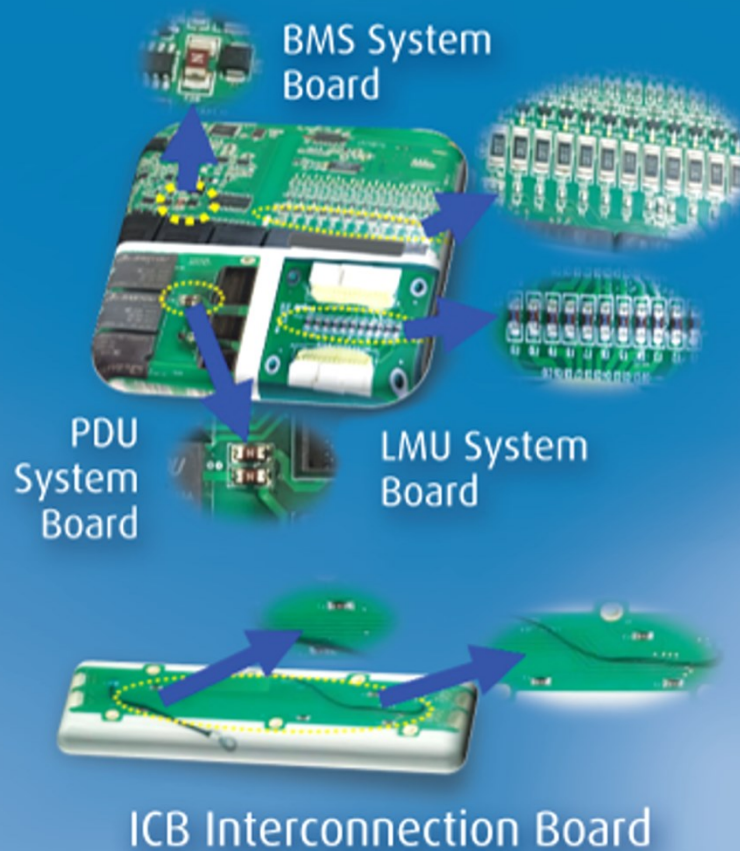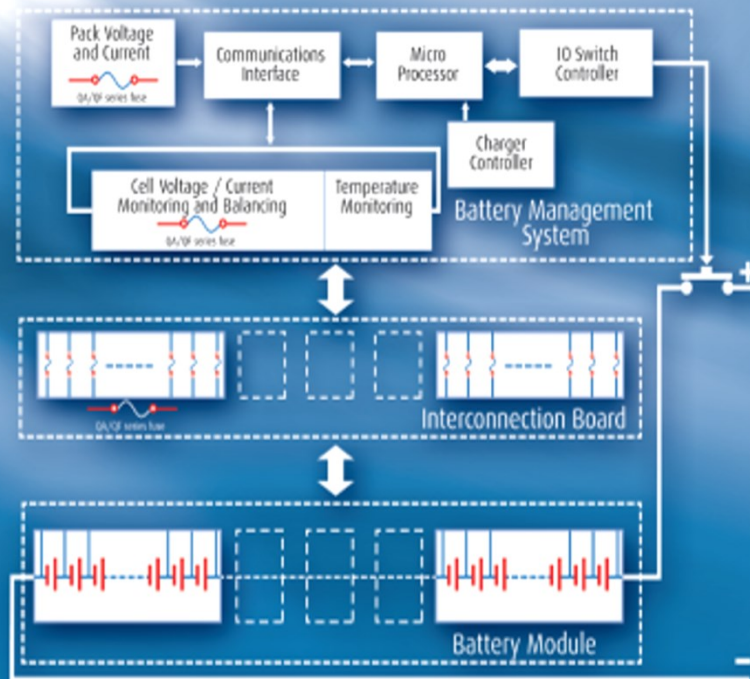

Automotive Surface Mount Fuses

Features:

AEM Components' AEC-Q200 Rev.E qualified and ISO IATF16949 certificated fuses are setting a new standard for reliable performance in demanding automotive applications. Choose from AirMatrix wire-in-air fuses and SolidMatrix solid body fuses for optimum performance under the hood or in the cabin.

AirMatrix® Platform

QA Series

- Excellent inrush current withstanding capability
- Fiberglass enforced epoxy fuse body
- Copper or copper alloy composite fuse link
- Copper termination with nickel and tin plating
- Operating temperature range:
-55°C to +125°C (with de-rating)

SolidMatrix® Platform

QF Series

- Multilayer monolithic structure with glass ceramic body and silver fusing element
- Silver termination with nickel and pure-tin solder plating, providing excellent solderability
- Compatible with both wave and reflow soldering processes
- Operating temperature range:
-55°C to +150°C (with de-rating)

Applications:

- Communications & Networks
- Battery Management Systems
- Infotainment Systems
- Under-the-hood Applications

Quick Index:

| Series | Size | Current Rating (A) | Voltage Rating | Page |
|---------|------|--|----------------|------|
| QA2410F | 2410 | 1.0, 1.5, 2.0 | 250VDC | 4 |
| | | 2.5, 3.0, 3.15, 3.5, 4.0, 5.0, 6.3, 7.0, 8.0, 10.0 | 125VDC | |
| | | 12.0, 15.0, 20.0 | 65VDC | |
| QA1206F | 1206 | 1.0, 1.5, 1.6, 2.0 | 125VDC | 7 |
| | | 2.5, 3.0, 3.15, 3.5, 4.0 | 65VDC | |
| | | 5.0, 6.3, 7.0, 8.0, 10.0, 12.0, 15.0 | 32VDC | |
| QF1206G | 1206 | 0.5, 0.75, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0 | 65VDC | 10 |
| QF0603G | 0603 | 0.5, 0.75, 1.0, 1.25, 1.5, 1.75 | 65VDC | 13 |
| | | 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0 | 35VDC | |
| | | 7.0, 8.0 | 24VDC | |
| QF1206F | 1206 | 0.5, 0.75, 1.0, 1.5, 1.75, 2.0 | 63VDC | 16 |
| | | 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0 | 32VDC | |
| QF0603F | 0603 | 1.0, 1.5 | 63VDC | 19 |
| | | 2.0, 2.5, 3.0, 3.5, 4.0, 5.0 | 32VDC | |
| | | 6.0 | 24VDC | |
| QF1206H | 1206 | 0.5, 0.75 | 65VDC | 22 |
| | | 1.0, 1.5, 2.0 | 63VDC | |
| | | 2.5, 3.0, 3.5, 4.0, 4.5, 5.0 | 32VDC | |
| | | 6.0 | 24VDC | |
| QF0603H | 0603 | 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0 | 32VDC | 25 |
| QM2822H | 2822 | 20, 30, 40, 50, 60, 70, 80, 90, 100, 125 | 75VDC | 28 |

Automotive Surface Mount Fuses

Product Identification:

Q A 1206 F 2A00 T

(1) (2) (3) (4) (5) (6)

(1) Product type code: Q- Automotive fuse

(2) Product code: A-AirMatrix Chip Fuse
F-SolidMatrix Chip Fuse

(3) Dimension code: L x W (inch)
The first two digits - L (length)
The last two digits - W (width)

(4) Characteristic code: F-fast acting, H-Slow Blow

(5) Current rating code: 2A00-2.0A

T – Tape and Reel
B – Bulk

Q A 2410 F 1A00 T -7

(1) (2) (3) (4) (5) (6) (6)

(1) Product type code: Q- Automotive fuse

(2) Product code: A-AirMatrix Chip Fuse, F-SolidMatrix Chip Fuse

(3) Dimension code: L x W (inch)

The first two digits - L (length)

The last two digits - W (width)

(4) Characteristic code: F-fast acting, H-Slow Blow


(5) Current rating code: 1A00-1.0A

(6) Package code: T – Tape and Reel B – Bulk


No suffix after T: - 2K Tape & Reel

With suffix -7 after T: - 7K Tape & Reel


Recommended Land Pattern:



2410 Size



1206 Size

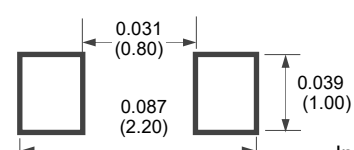

0603 Size

Fuse Selection and Temperature De-rating Guideline:


The ambient temperature affects the current carrying capacity of fuses. When a fuse is operating at a temperature higher than 25°C, the fuse shall be “de-rated”.

To select a fuse from the catalog, the following rule may be followed:


Catalog Fuse Current Rating = Nominal Operating Current / 0.75 / % De-rating at the maximum operating temperature.

Example: At maximum operating temperature of 65°C, % De-rating is 90%. The nominal operating current is 4 A. The current rating for fuse selected from the catalog shall be: $4 / 0.75 / 90\% = 5.9$ or 6 A. Specifications and descriptions in this literature are as accurate as known at the time of publish, but are subject to change without notice.

Effect of Ambient Temperature on Current Rating of QA2410 and QA1210 Series.

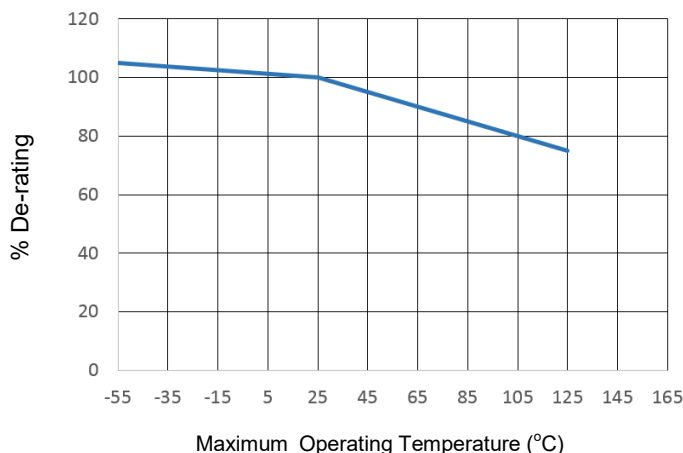


Effect of Ambient Temperature on Current Rating of QF1206 and QF0603 Series.

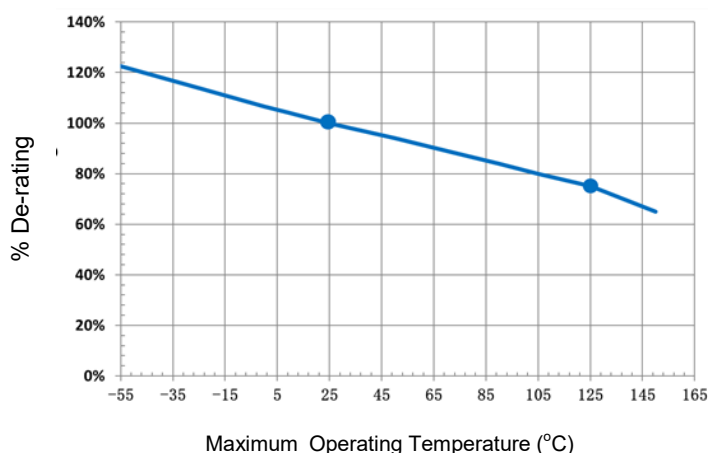

Automotive Surface Mount Fuses

Soldering Temperature Profile:


* Recommended Temperature Profile for Reflow Soldering

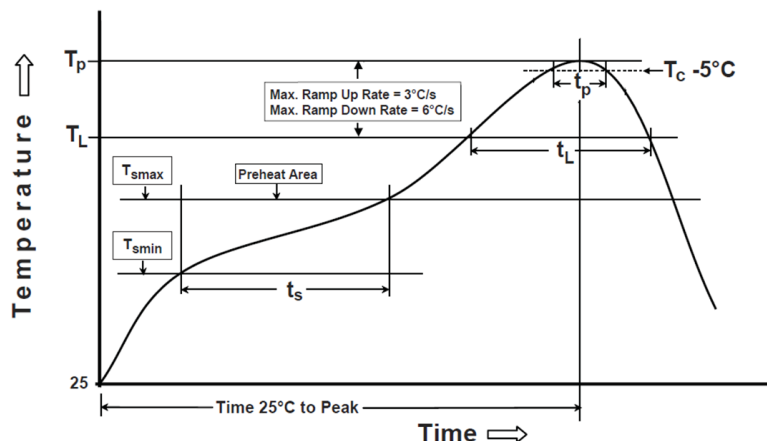

| Profile Feature | Pb-Free Assembly |
|--|----------------------------------|
| Preheat/Soak Temperature Min (T_{smin}) Temperature Max (T_{smax}) Time (t_s) from (T_{smin} to T_{smax}) | 150°C 200°C 60~120 seconds |
| Ramp-up rate (T_L to T_p) | 3°C/second max. |
| Liquidous temperature (T_L) Time (t_L) maintained above T_L | 217°C 60~150 seconds |
| Peak package body temperature (T_p) | 260°C |
| Time (t_p)* within 5°C of the specified classification temperature (T_c) | 30 seconds * |
| Ramp-down rate (T_p to T_L) | 6°C/second max. |
| Time 25°C to peak temperature | 8 minutes max. |
| * Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum | |

* Recommended Temperature Profile for Wave Soldering

Recommended Temperature Profile for Wave Soldering

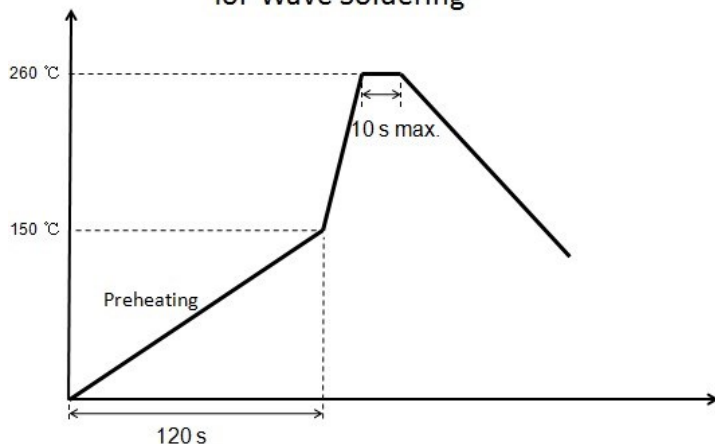

Notice: Wave Soldering is suitable for 1206 and 0603 size.

Packaging:

| Chip Size | Parts on 7 inch (178 mm) Reel | Parts on 13 inch (330 mm) Reel |
|------------------------|-------------------------------|--------------------------------|
| 0603 (1608) | 4,000 | - |
| 1206 (3216) | 3,000 | - |
| 1206 (3216), QA Series | 3,500 | - |
| 2410 (6125) | 2,000 | 7,000 |

AirMatrix® Automotive Surface Mount Fuses

QA2410F Series




Agency Approval:

| Agency | File NO. |
|--------|----------|
| UL | E232989 |

Shape and Dimensions:

| Unit | Inch | mm |
|------|---------------|-------------|
| L | 0.240 ± 0.006 | 6.10 ± 0.15 |
| W | 0.098 ± 0.006 | 2.49 ± 0.15 |
| T | 0.085 ± 0.008 | 2.16 ± 0.20 |
| B | 0.053 ± 0.015 | 1.35 ± 0.38 |



Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C | |
|---------------------|-----------------------|------------|
| | Min. | Max. |
| 100% | 4 hours | |
| 200% (1.0-10.0A) | 0.01 second | 5 seconds |
| 200% | 0.01 second | 20 seconds |

Ordering Information:

| Part Number | Current Rating (A) | Voltage Rating (VDC) | Interrupting Ratings | Nominal Cold DCR (Ω) ¹ | Nominal I ² t (A ² s) ² | Marking Code ³ | |
|--------------|--------------------|----------------------|--|--|--|---------------------------|---|
| QA2410F1A00T | 1.00 | 250 | 1.0-2.0A: 100A @ 250VDC 300A @ 32VDC 2.5-10.0A: 50A @ 125VDC 300A @ 32VDC 12.0-15.0A: 50A @ 65VDC 300A @ 32VDC 20.0A: 100A @ 65VDC 300A @ 32VDC | 0.093 | 0.59 | E | |
| QA2410F1A25T | 1.25 | | | 0.070 | 0.96 | F | |
| QA2410F1A50T | 1.50 | | | 0.060 | 1.19 | G | |
| QA2410F2A00T | 2.00 | | | 0.042 | 2.75 | I | |
| QA2410F2A50T | 2.50 | 125 | | 0.031 | 1.21 | J | |
| QA2410F3A00T | 3.00 | | | 0.0249 | 1.73 | K | |
| QA2410F3A15T | 3.15 | | | 0.0230 | 2.2 | V | |
| QA2410F3A50T | 3.50 | | | 0.0210 | 2.5 | L | |
| QA2410F4A00T | 4.00 | | | 0.0175 | 3.3 | M | |
| QA2410F5A00T | 5.00 | | | 0.0146 | 5.9 | N | |
| QA2410F6A30T | 6.30 | | | 0.0100 | 12.5 | O | |
| QA2410F7A00T | 7.00 | | | 0.0097 | 14.2 | P | |
| QA2410F8A00T | 8.00 | | | 0.0085 | 16.5 | R | |
| QA2410F10A0T | 10.0 | | | 0.0068 | 29.2 | Q | |
| QA2410F12A0T | 12.0 | | | 65 | 0.0053 | 39.3 | X |
| QA2410F15A0T | 15.0 | | | | 0.0037 | 102.5 | Y |
| QA2410F20A0T | 20.0 | 0.0029 | | | 126.2 | Z | |

1. Measured at $\leq 10\%$ rated current and 25°C ambient.


2. Melting I^2t at 0.001 second pre-arcing time.

3. Blue Marking Character Code.

AirMatrix® Automotive Surface Mount Fuses

QA2410F Series


Average Pre-arcing Time Curves:

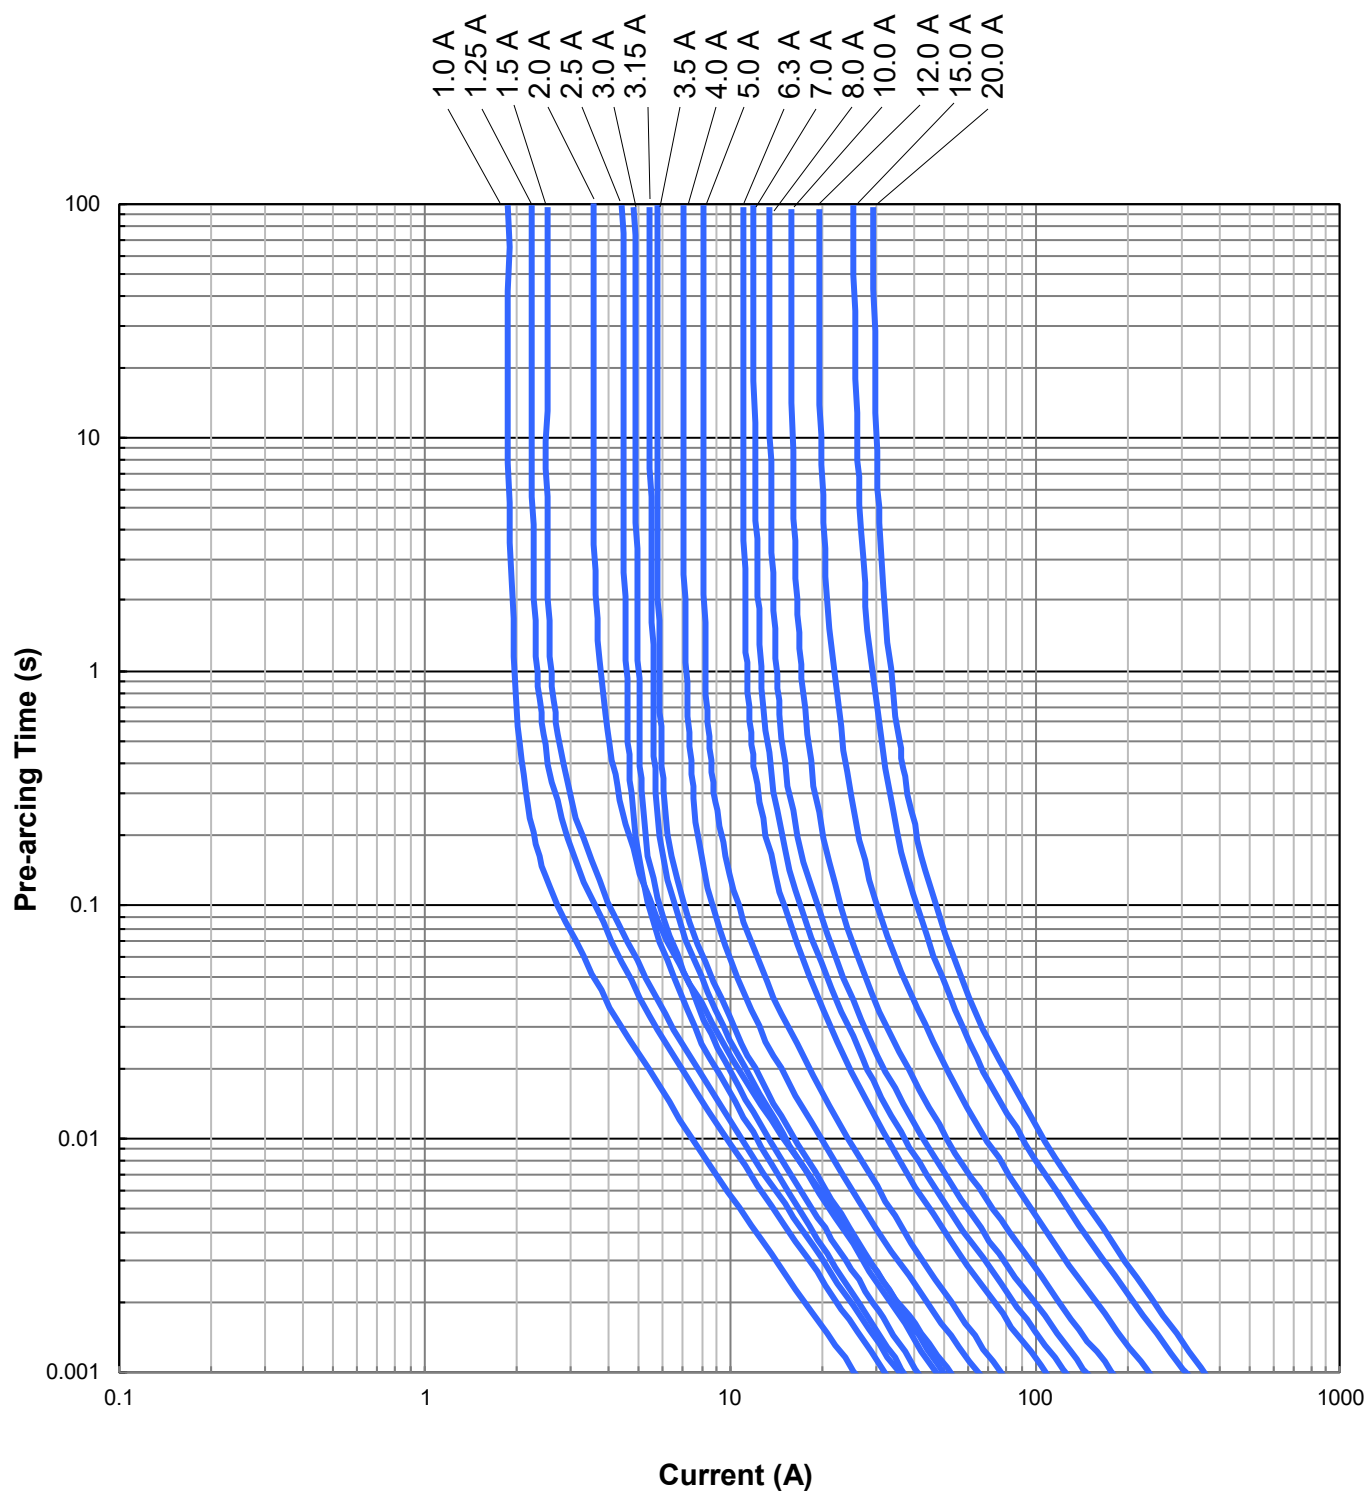

AirMatrix® Automotive Surface Mount Fuses

QA2410F Series

Average I^2t vs. t Curves:

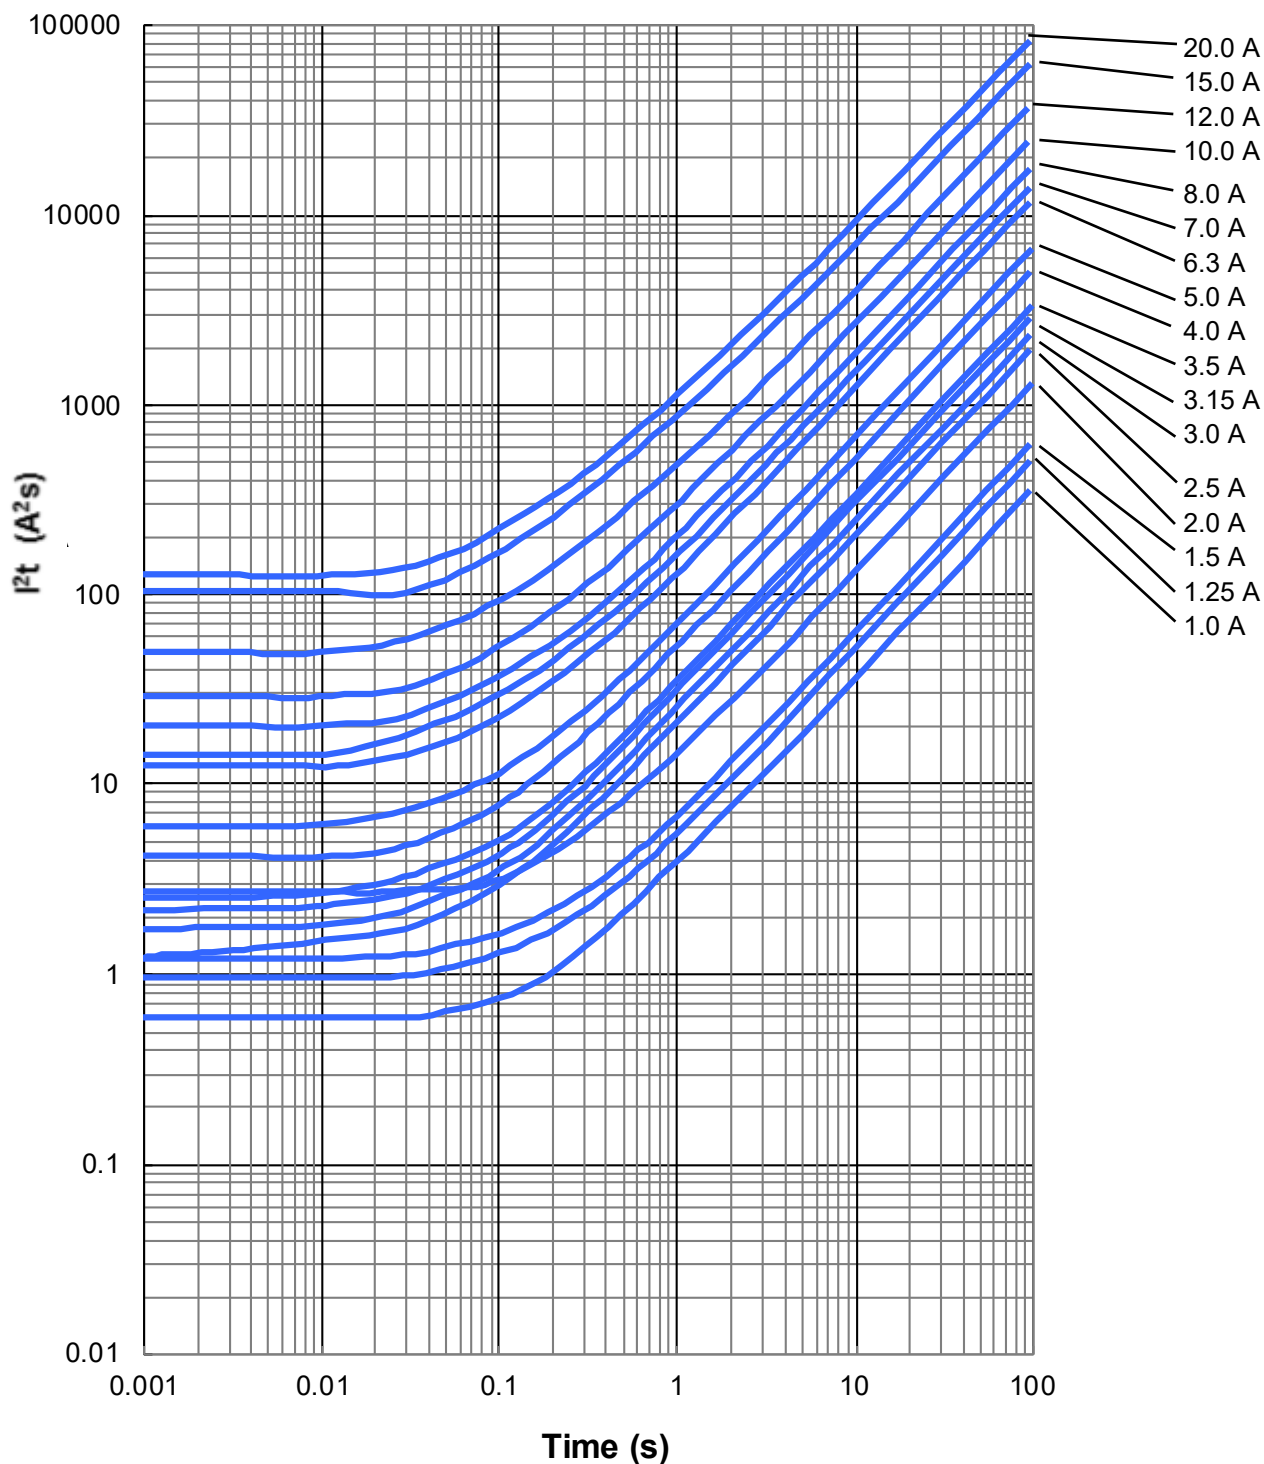

AirMatrix® Automotive Surface Mount Fuses

QA1206F Series




Agency Approval:

| Agency | File NO. |
|--------|----------|
| UL | E232989 |

Shape and Dimensions:

| Unit | Inch | mm |
|------|------------------------|---------------------|
| L | 0.126 ± 0.008 | 3.20 ± 0.20 |
| W | 0.063 + 0.012 / -0.004 | 1.60 + 0.30 / -0.10 |
| T | 0.042 ± 0.006 | 1.08 ± 0.15 |
| B | 0.033 ± 0.012 | 0.85 ± 0.30 |



Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C | |
|---------------------|-----------------------|-----------|
| | Min. | Max. |
| 100% | 4 hours | |
| 250% | | 5 seconds |

Ordering Information:


| Part Number | Current Rating (A) | Voltage Rating (VDC) | Interrupting Ratings | Nominal Cold DCR (Ω) ¹ | Nominal I ² t (A ² s) ² | Marking Code ³ |
|--------------|--------------------|----------------------|----------------------|--|--|---------------------------|
| QA1206F1A00T | 1.00 | 125 | 50 A @ 125VDC | 0.066 | 0.21 | E |
| QA1206F1A50T | 1.50 | | | 0.050 | 0.37 | G |
| QA1206F1A60T | 1.60 | | | 0.043 | 0.52 | T |
| QA1206F2A00T | 2.00 | | | 0.032 | 0.88 | I |
| QA1206F2A50T | 2.50 | 65 | 50 A @ 65VDC | 0.028 | 1.1 | J |
| QA1206F3A00T | 3.00 | | | 0.0224 | 1.9 | K |
| QA1206F3A15T | 3.15 | | | 0.0203 | 2.2 | V |
| QA1206F3A50T | 3.50 | | | 0.0180 | 2.6 | L |
| QA1206F4A00T | 4.00 | 32 | 50 A @ 32VDC | 0.0161 | 3.3 | M |
| QA1206F5A00T | 5.00 | | | 0.0129 | 5.4 | N |
| QA1206F6A30T | 6.30 | | | 0.0100 | 8.9 | O |
| QA1206F7A00T | 7.00 | | | 0.0094 | 10.4 | P |
| QA1206F8A00T | 8.00 | | | 0.0084 | 13.5 | R |
| QA1206F10A0T | 10.0 | | | 0.0050 | 11.2 | Q |
| QA1206F12A0T | 12.0 | | | 0.0041 | 15.0 | X |
| QA1206F15A0T | 15.0 | | | 0.0035 | 24.5 | Y |

- Measured at ≤ 10% rated current and 25°C ambient.
- Melting I²t at 0.001 second pre-arcing time.
- Blue Marking Character Code.

AirMatrix® Automotive Surface Mount Fuses

QA1206F Series


Average Pre-arcing Time Curves:

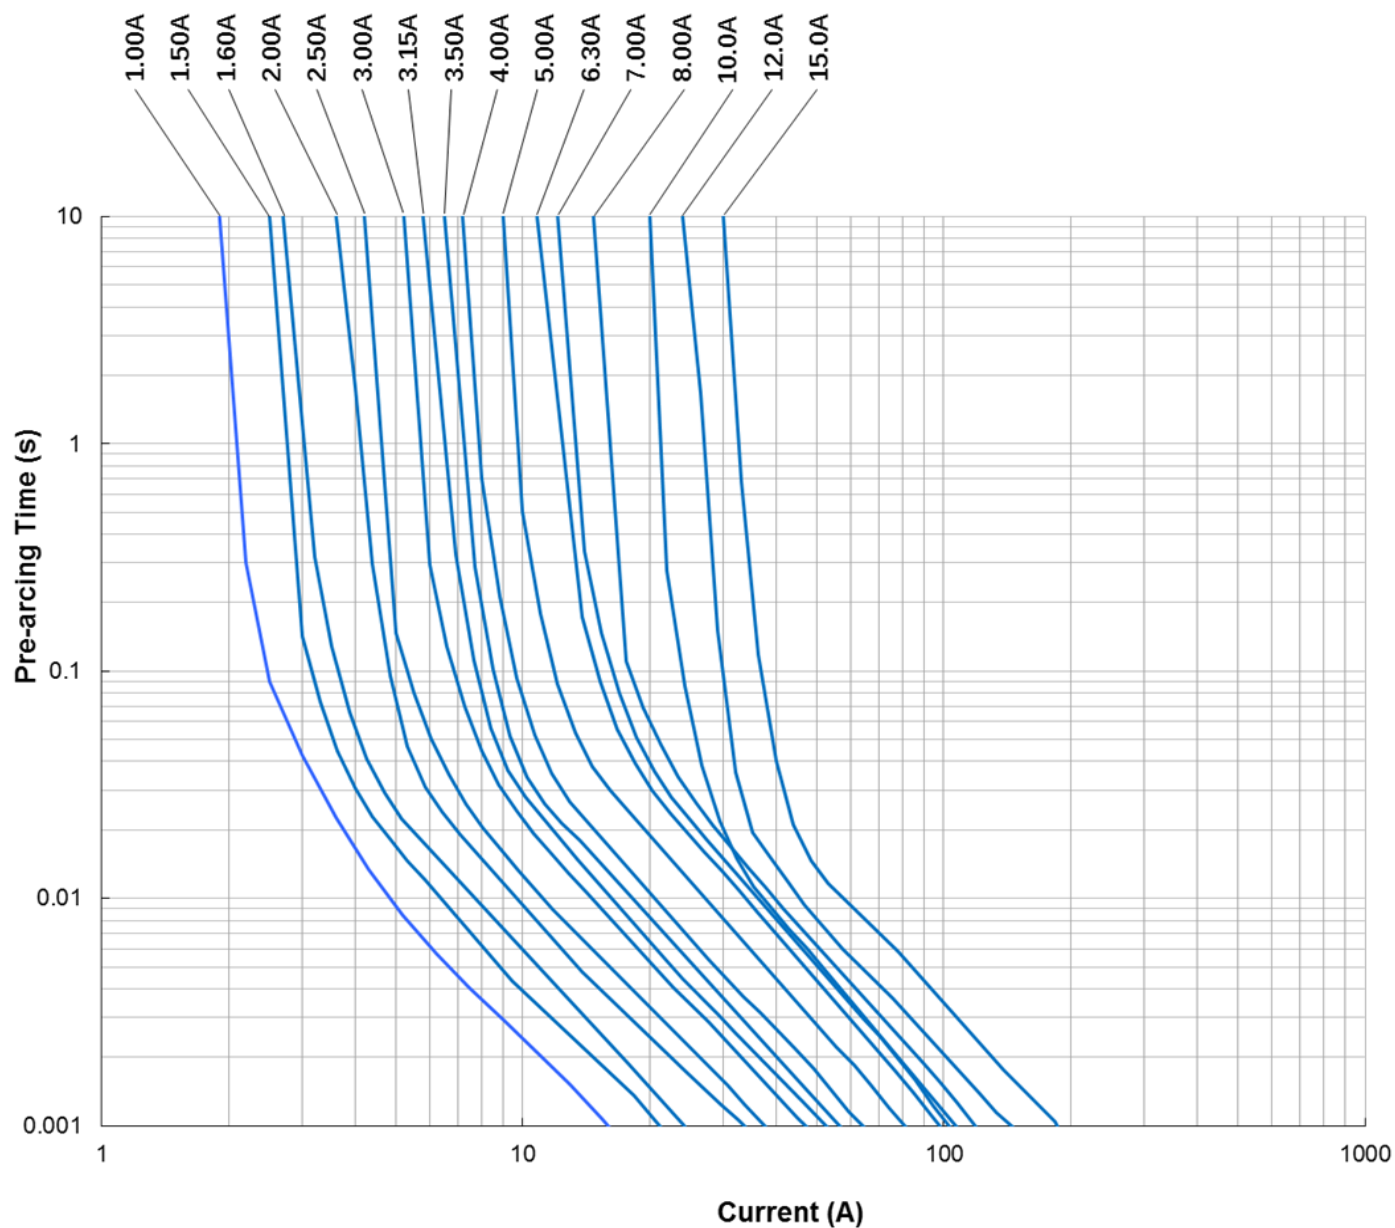

AirMatrix® Automotive Surface Mount Fuses


QA1206F Series

Average I^2t vs. t Curves:

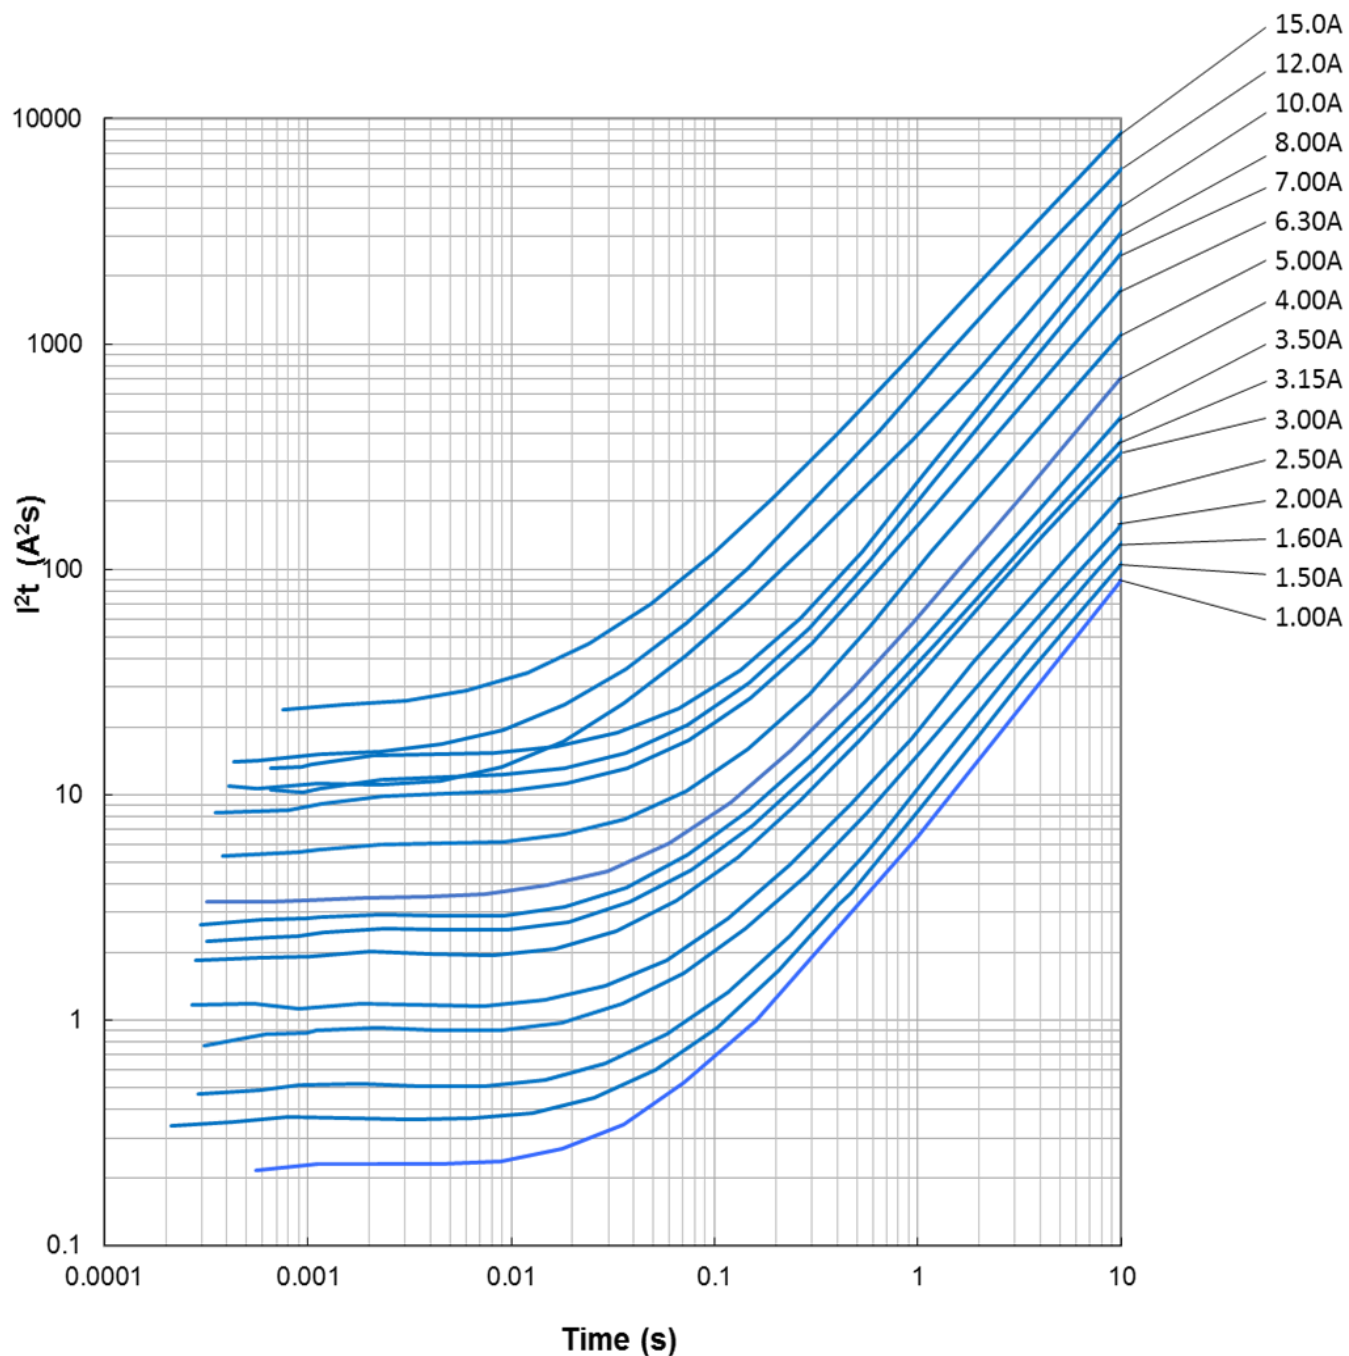

SolidMatrix® Automotive Surface Mount Fuses

QF1206G Series

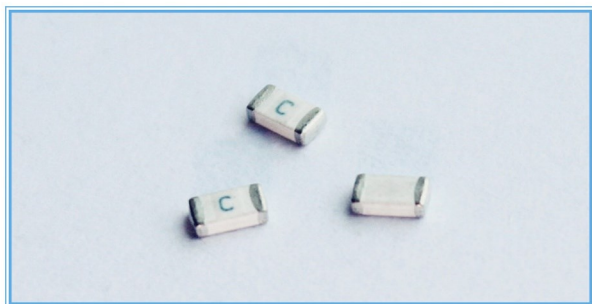


Agency Approval:

| Agency | File NO. |
|--------|----------|
| UL | E232989 |

Shape and Dimensions:

| Unit | Inch | mm |
|------|---------------|-------------|
| L | 0.126 ± 0.008 | 3.20 ± 0.20 |
| W | 0.063 ± 0.008 | 1.60 ± 0.20 |
| T | 0.033 ± 0.008 | 0.85 ± 0.20 |
| B | 0.020 ± 0.010 | 0.51 ± 0.25 |



Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C | |
|---------------------|-----------------------|-----------|
| | Min. | Max. |
| 100% | 4 hours | |
| 250% | | 5 seconds |


Ordering Information:

| Part Number | Current Rating (A) | Voltage Rating (VDC) | Interrupting Ratings | Nominal Cold DCR (Ω) ¹ | Nominal I^2t (A^2s) ² | Marking Code ³ |
|--------------|--------------------|----------------------|----------------------|--|--|---------------------------|
| QF1206GA500T | 0.5 | 65 | 50A @ 65VDC | 1.080 | 0.006 | C |
| QF1206GA750T | 0.75 | | | 0.513 | 0.016 | D |
| QF1206G1A00T | 1.0 | | | 0.420 | 0.048 | E |
| QF1206G1A50T | 1.5 | | | 0.209 | 0.120 | G |
| QF1206G2A00T | 2.0 | | | 0.140 | 0.330 | I |
| QF1206G2A50T | 2.5 | | | 0.070 | 0.480 | J |
| QF1206G3A00T | 3.0 | | | 0.051 | 0.600 | K |
| QF1206G3A50T | 3.5 | | | 0.039 | 0.750 | L |
| QF1206G4A00T | 4.0 | | | 0.032 | 0.900 | M |
| QF1206G4A50T | 4.5 | | | 0.027 | 1.120 | T |
| QF1206G5A00T | 5.0 | | | 0.023 | 1.500 | N |

- Measured at ≤10% rated current and 25°C ambient.
- Melting I^2t at 0.001 second pre-arcing time.
- Cyan marking character code at the top side (0.5-0.75A), cyan marking character code at both sides (1-8A).

SolidMatrix® Automotive Surface Mount Fuses QF1206G Series


Average Pre-arcing Time Curves:

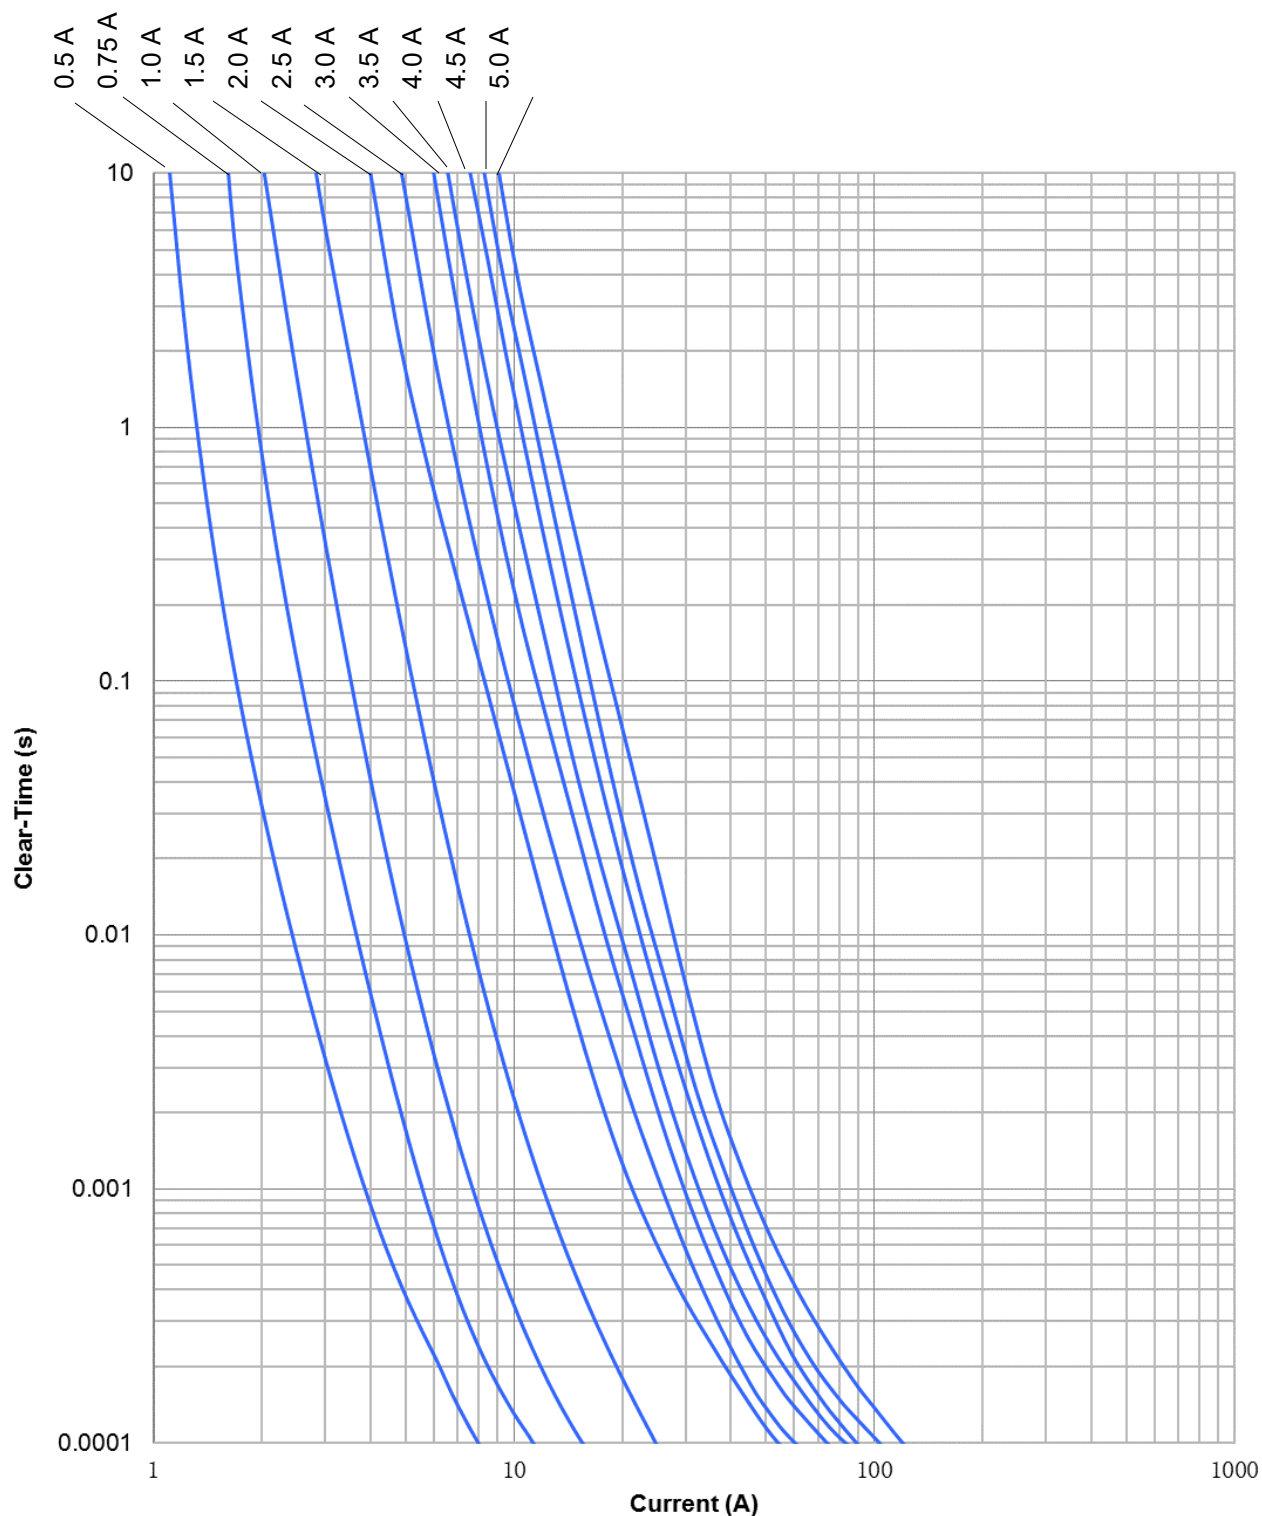

SolidMatrix[®] Automotive Surface Mount Fuses

QF1206G Series

Average I^2t vs. t Curves:

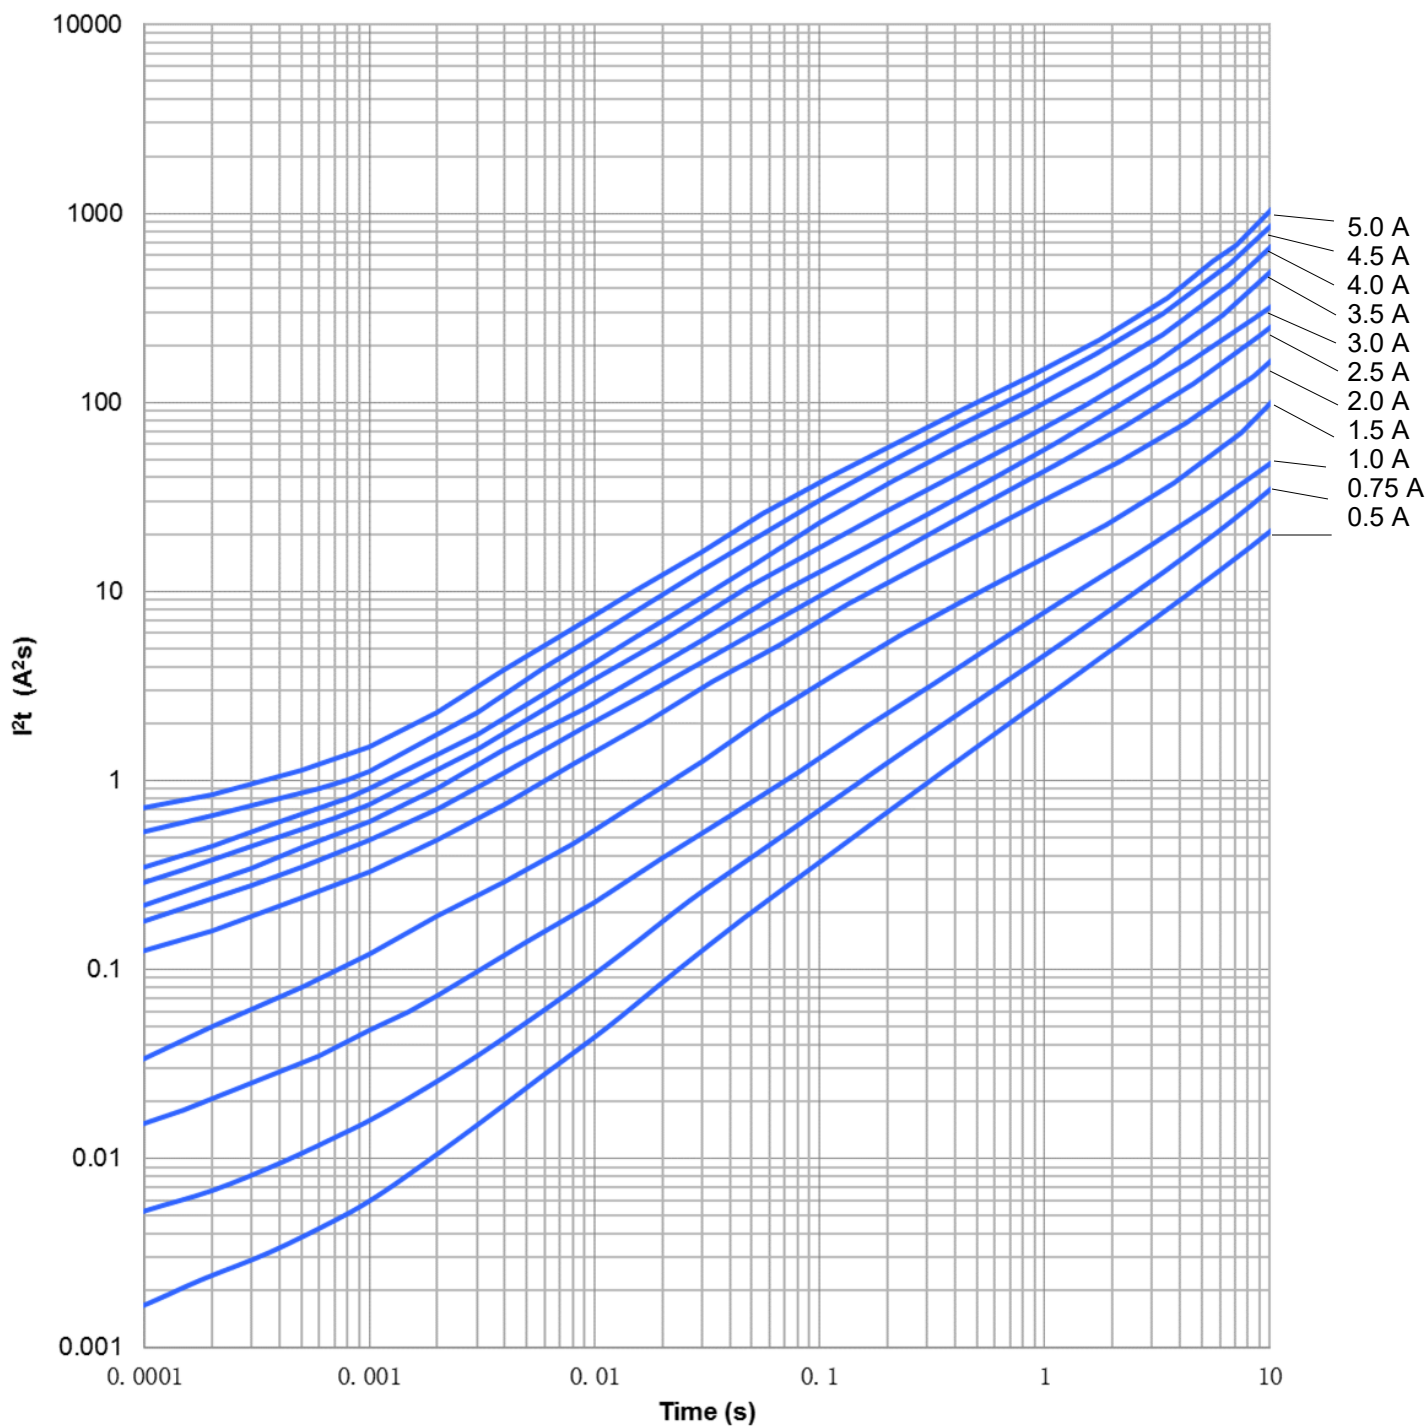

SolidMatrix® Automotive Surface Mount Fuses

QF0603G Series




Agency Approval:

| Agency | File NO. |
|--------|----------|
| UL | E232989 |

Shape and Dimensions:

| Unit | Inch | mm |
|------|---------------|-------------|
| L | 0.063 ± 0.006 | 1.60 ± 0.15 |
| W | 0.031 ± 0.006 | 0.80 ± 0.15 |
| T | 0.031 ± 0.006 | 0.80 ± 0.15 |
| B | 0.014 ± 0.006 | 0.36 ± 0.15 |



Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C | |
|---------------------|-----------------------|-----------|
| | Min. | Max. |
| 100% | 4 hours | |
| 250% | | 5 seconds |

Ordering Information:

| Part Number | Current Rating (A) | Voltage Rating (VDC) | Interrupting Ratings | Nominal Cold DCR (Ω) ¹ | Nominal I ² t (A ² s) ² | Marking Code ³ |
|--------------|--------------------|----------------------|----------------------|--|--|---------------------------|
| QF0603GA500T | 0.5 | 65 | 50A @ 65VDC | 0.827 | 0.004 | C |
| QF0603GA750T | 0.75 | | | 0.373 | 0.012 | D |
| QF0603G1A00T | 1.0 | | | 0.237 | 0.030 | E |
| QF0603G1A25T | 1.25 | | | 0.153 | 0.065 | F |
| QF0603G1A50T | 1.5 | | | 0.116 | 0.10 | G |
| QF0603G1A75T | 1.75 | | | 0.091 | 0.145 | H |
| QF0603G2A00T | 2.0 | 35 | 50A @ 35VDC | 0.067 | 0.18 | I |
| QF0603G2A50T | 2.5 | | | 0.039 | 0.22 | J |
| QF0603G3A00T | 3.0 | | | 0.029 | 0.34 | K |
| QF0603G3A50T | 3.5 | | | 0.024 | 0.39 | L |
| QF0603G4A00T | 4.0 | | | 0.020 | 0.53 | M |
| QF0603G5A00T | 5.0 | | | 0.012 | 0.88 | N |
| QF0603G6A00T | 6.0 | | | 0.011 | 1.09 | O |
| QF0603G7A00T | 7.0 | 24 | 80A @ 24VDC | 0.008 | 1.86 | P |
| QF0603G8A00T | 8.0 | | | 0.007 | 2.7 | R |


1. Measured at ≤10% of rated current and 25°C ambient.

2. Melting I²t at 0.001 second pre-arcing time.

3. Cyan marking character code.


SolidMatrix[®] Automotive Surface Mount Fuses QF0603G Series

Average Pre-arcing Time Curves:

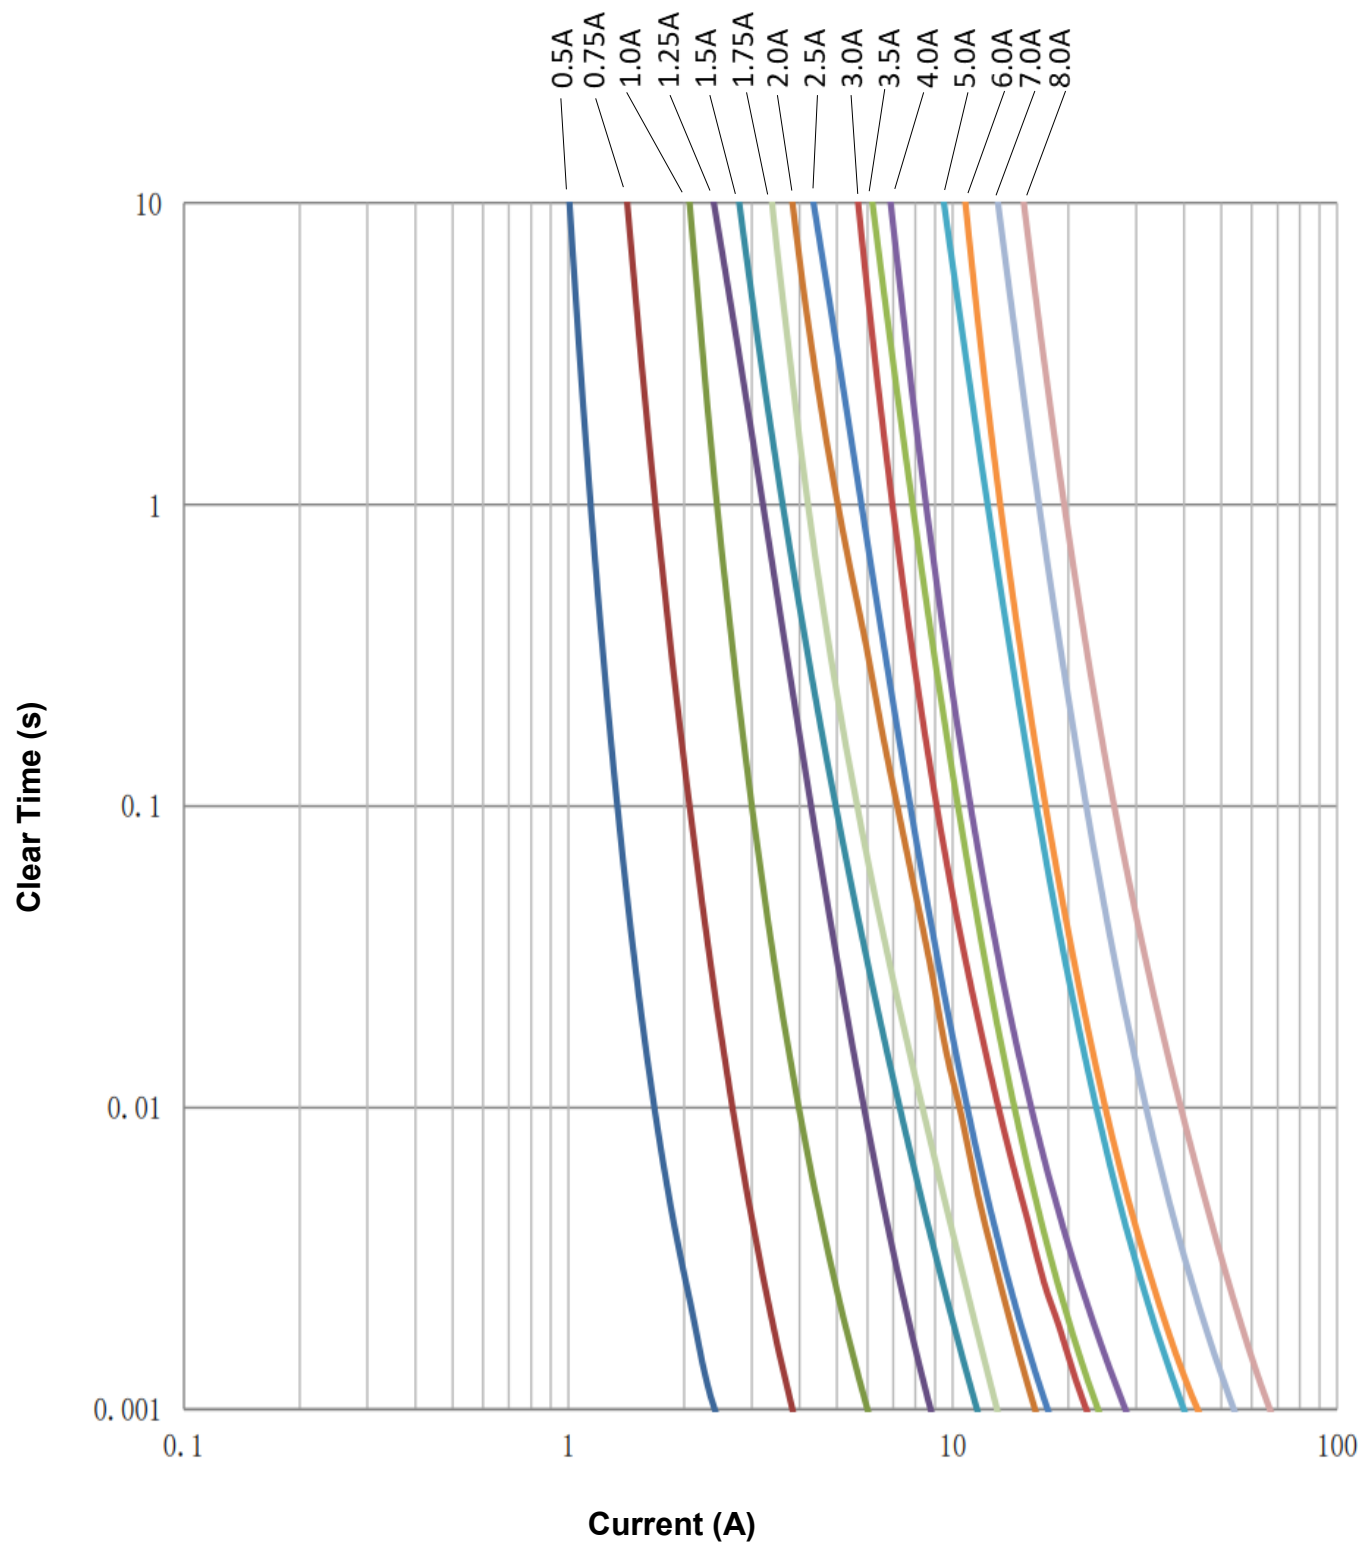

SolidMatrix[®] Automotive Surface Mount Fuses QF0603G Series

Average I^2t vs. t Curves:

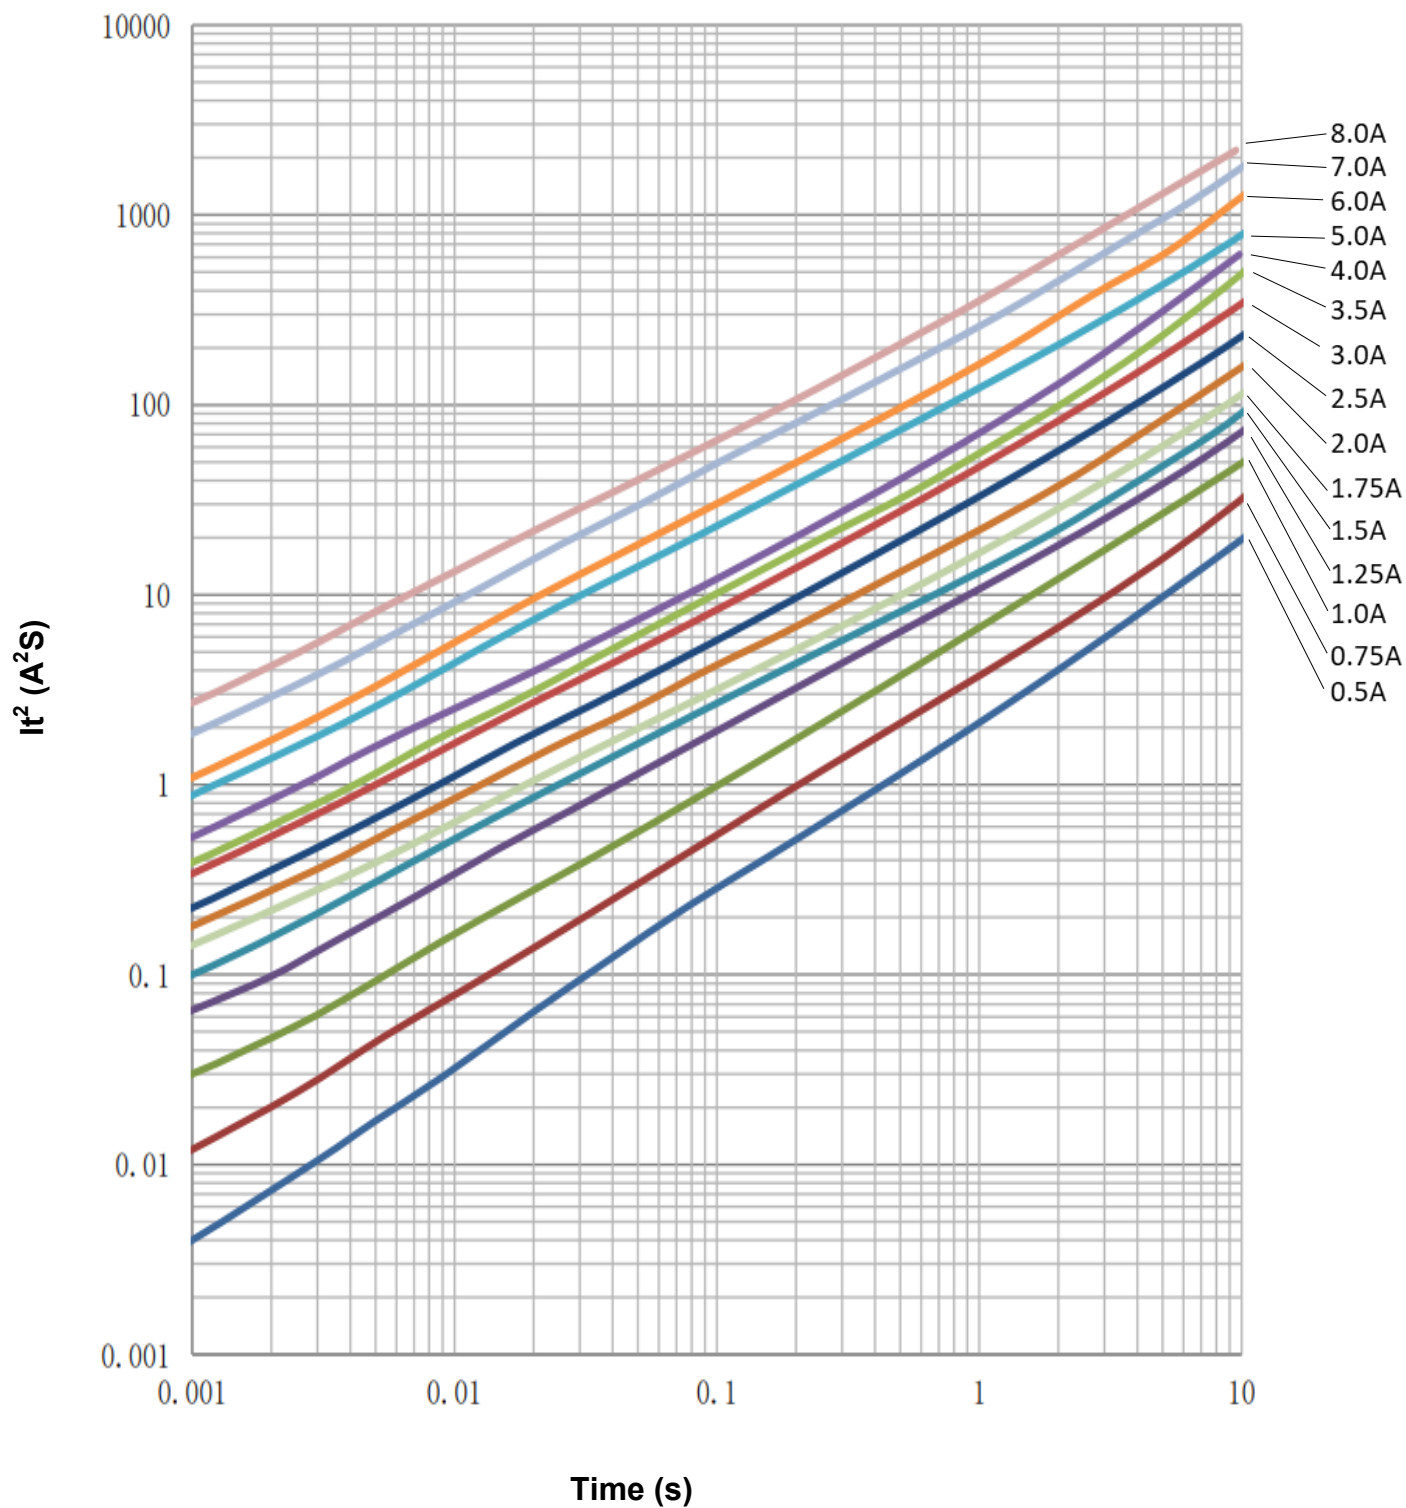

SolidMatrix® Automotive Surface Mount Fuses

QF1206F Series




Agency Approval:

| Agency | File NO. |
|--------|----------|
| UL | E232989 |

Shape and Dimensions:

| Unit | Inch | mm |
|------|---------------|-------------|
| L | 0.126 ± 0.008 | 3.20 ± 0.20 |
| W | 0.063 ± 0.008 | 1.60 ± 0.20 |
| T | 0.033 ± 0.008 | 0.85 ± 0.20 |
| B | 0.020 ± 0.010 | 0.51 ± 0.25 |



Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C | |
|---------------------|-----------------------|-------------|
| | Min. | Max. |
| 100% | 4 hours | |
| 250% | | 5 seconds |
| 400% | | 0.05 second |


Ordering Information:

| Part Number | Current Rating (A) | Voltage Rating (VDC) | Interrupting Ratings | Nominal Cold DCR (Ω) ¹ | Nominal I^2t (A ² s) ² | Marking Code ³ |
|--------------|--------------------|----------------------|----------------------|--|--|---------------------------|
| QF1206FA500T | 0.5 | 63 | 50A @ 63VDC | 0.780 | 0.003 | C |
| QF1206FA750T | 0.75 | | | 0.530 | 0.008 | D |
| QF1206F1A00T | 1.0 | | | 0.250 | 0.012 | E |
| QF1206F1A50T | 1.5 | | | 0.110 | 0.026 | G |
| QF1206F1A75T | 1.75 | | | 0.098 | 0.046 | H |
| QF1206F2A00T | 2.0 | | | 0.054 | 0.076 | I |
| QF1206F2A50T | 2.5 | 32 | 50A @ 32VDC | 0.040 | 0.115 | J |
| QF1206F3A00T | 3.0 | | | 0.036 | 0.220 | K |
| QF1206F4A00T | 4.0 | | 45A @ 32VDC | 0.022 | 0.360 | M |
| QF1206F5A00T | 5.0 | | | 0.015 | 0.620 | N |
| QF1206F6A00T | 6.0 | | 50A @ 32VDC | 0.013 | 0.850 | + |
| QF1206F7A00T | 7.0 | | | 0.011 | 1.030 | - |
| QF1206F8A00T | 8.0 | | | 0.008 | 2.040 | = |

- Measured at ≤ 10% rated current and 25°C ambient.
- Melting I^2t at 0.001 second pre-arcing time.
- Black Marking Character Code.


SolidMatrix[®] Automotive Surface Mount Fuses QF1206F Series

Average Pre-arcing Time Curves:

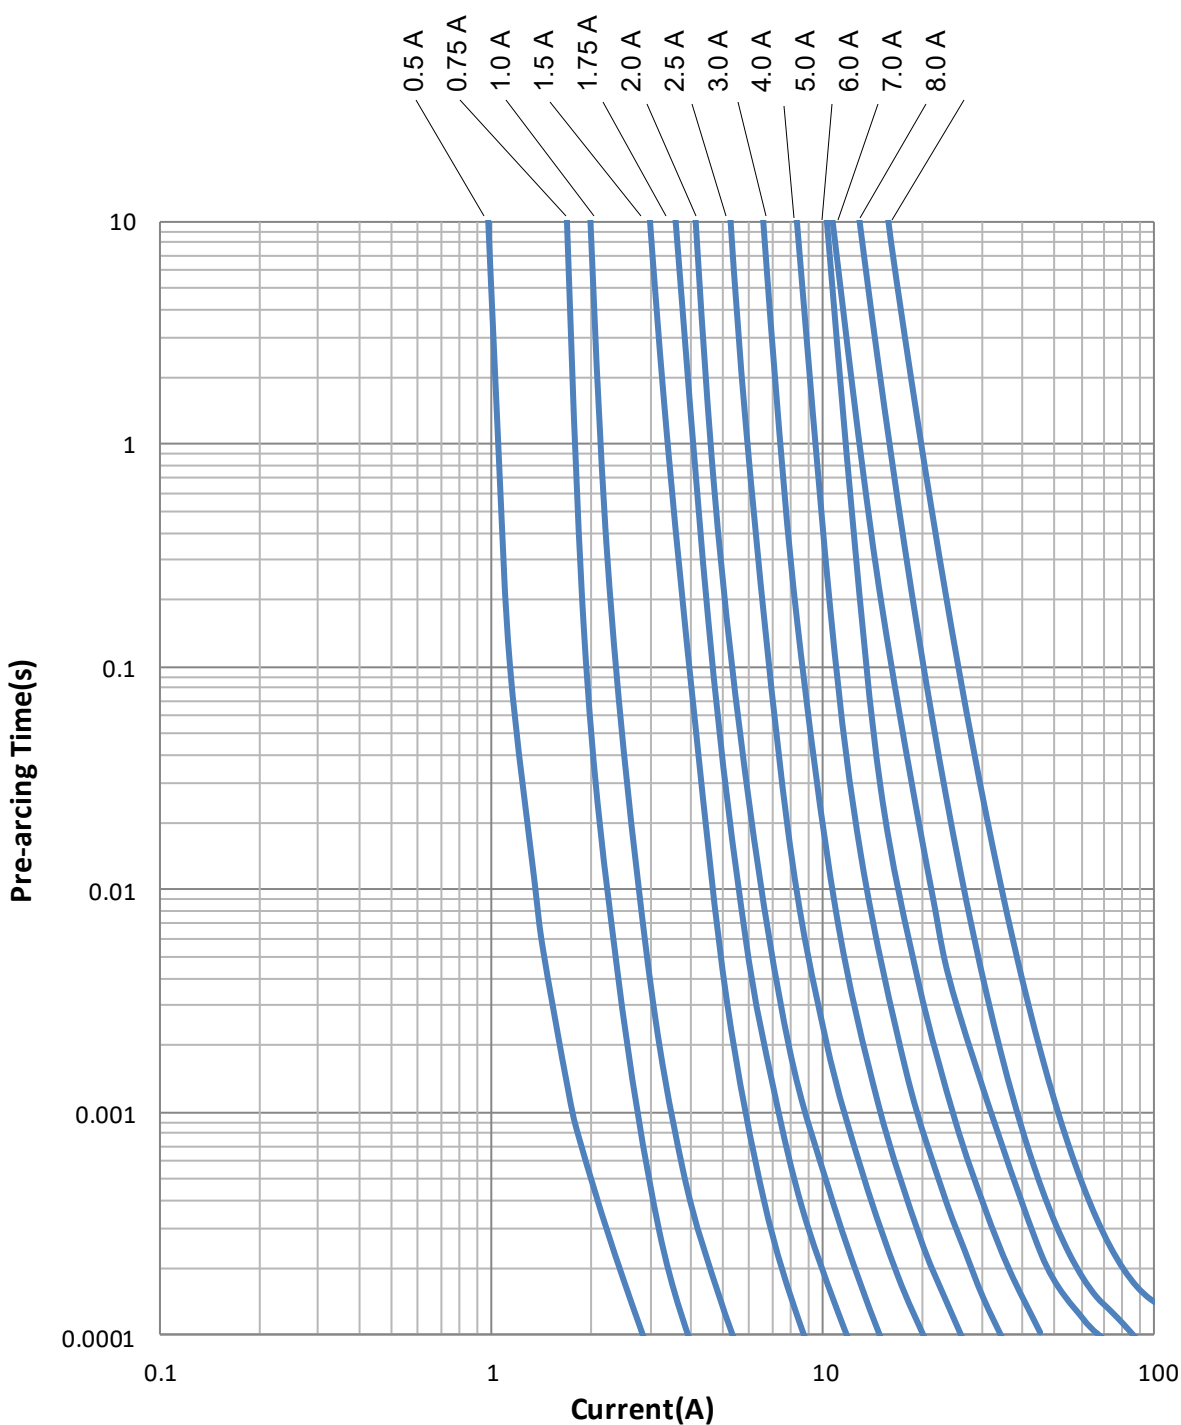

SolidMatrix[®] Automotive Surface Mount Fuses QF1206F Series

Average I^2t vs. t Curves:

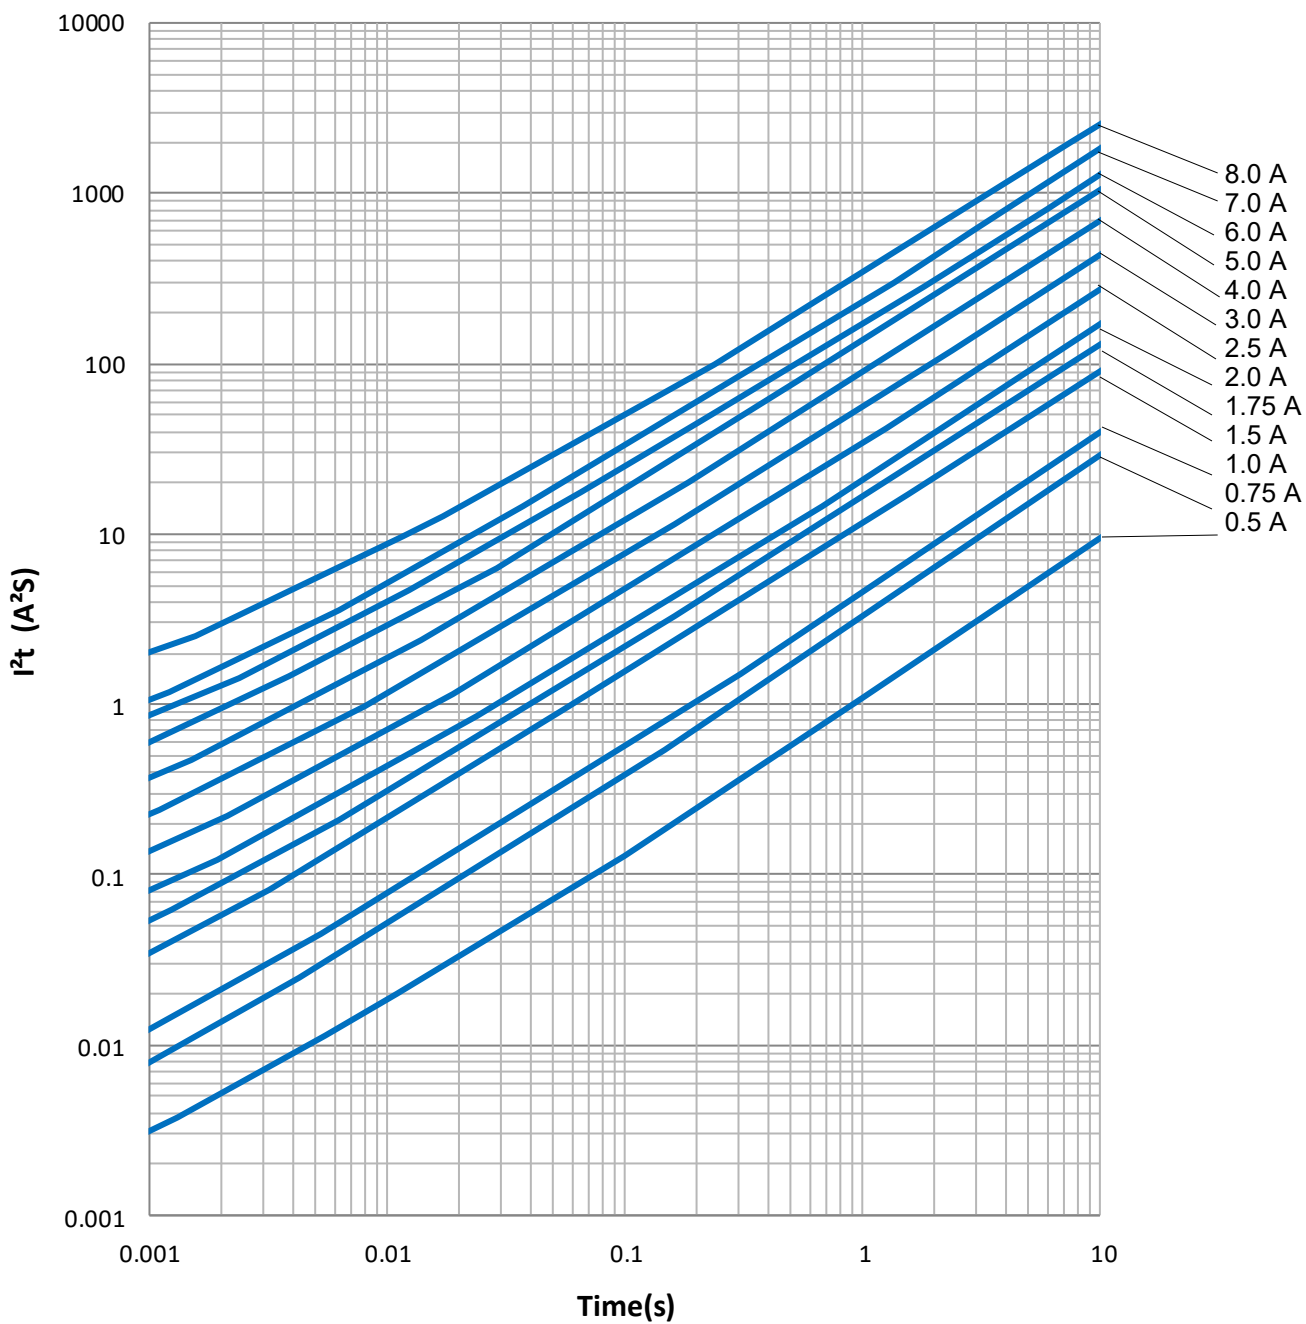

SolidMatrix® Automotive Surface Mount Fuses

QF0603F Series




Agency Approval:

| Agency | File NO. |
|--------|----------|
| UL | E232989 |

Shape and Dimensions:

| Unit | Inch | mm |
|------|-------------------|-----------------|
| L | 0.063 ± 0.006 | 1.60 ± 0.15 |
| W | 0.031 ± 0.006 | 0.80 ± 0.15 |
| T | 0.031 ± 0.006 | 0.80 ± 0.15 |
| B | 0.014 ± 0.006 | 0.36 ± 0.15 |



Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C | |
|---------------------|-----------------------|-------------|
| | Min. | Max. |
| 100% | 4 hours | |
| 250% | | 5 seconds |
| 400% | | 0.05 second |


Ordering Information:

| Part Number | Current Rating (A) | Voltage Rating (VDC) | Interrupting Ratings | Nominal Cold DCR (Ω) ¹ | Nominal I^2t (A^2s) ² | Marking Code ³ |
|--------------|--------------------|----------------------|----------------------|--|--|---------------------------|
| QF0603F1A00T | 1.0 | 63 | 35A @ 63VDC | 0.150 | 0.0132 | E |
| QF0603F1A50T | 1.5 | | | 0.063 | 0.043 | G |
| QF0603F2A00T | 2.0 | 32 | 35A @ 32VDC | 0.044 | 0.070 | I |
| QF0603F2A50T | 2.5 | | | 0.034 | 0.103 | J |
| QF0603F3A00T | 3.0 | | | 0.025 | 0.183 | K |
| QF0603F3A50T | 3.5 | | | 0.024 | 0.306 | L |
| QF0603F4A00T | 4.0 | | | 0.019 | 0.508 | M |
| QF0603F5A00T | 5.0 | | | 0.013 | 0.810 | N |
| QF0603F6A00T | 6.0 | 24 | 35A @ 24VDC | 0.010 | 1.120 | O |

1. Measured at $\leq 10\%$ rated current and 25°C ambient.
2. Melting I^2t at 0.001 second pre-arcing time.
3. Black Marking Character Code.


SolidMatrix[®] Automotive Surface Mount Fuses QF0603F Series

Average Pre-arcing Time Curves:

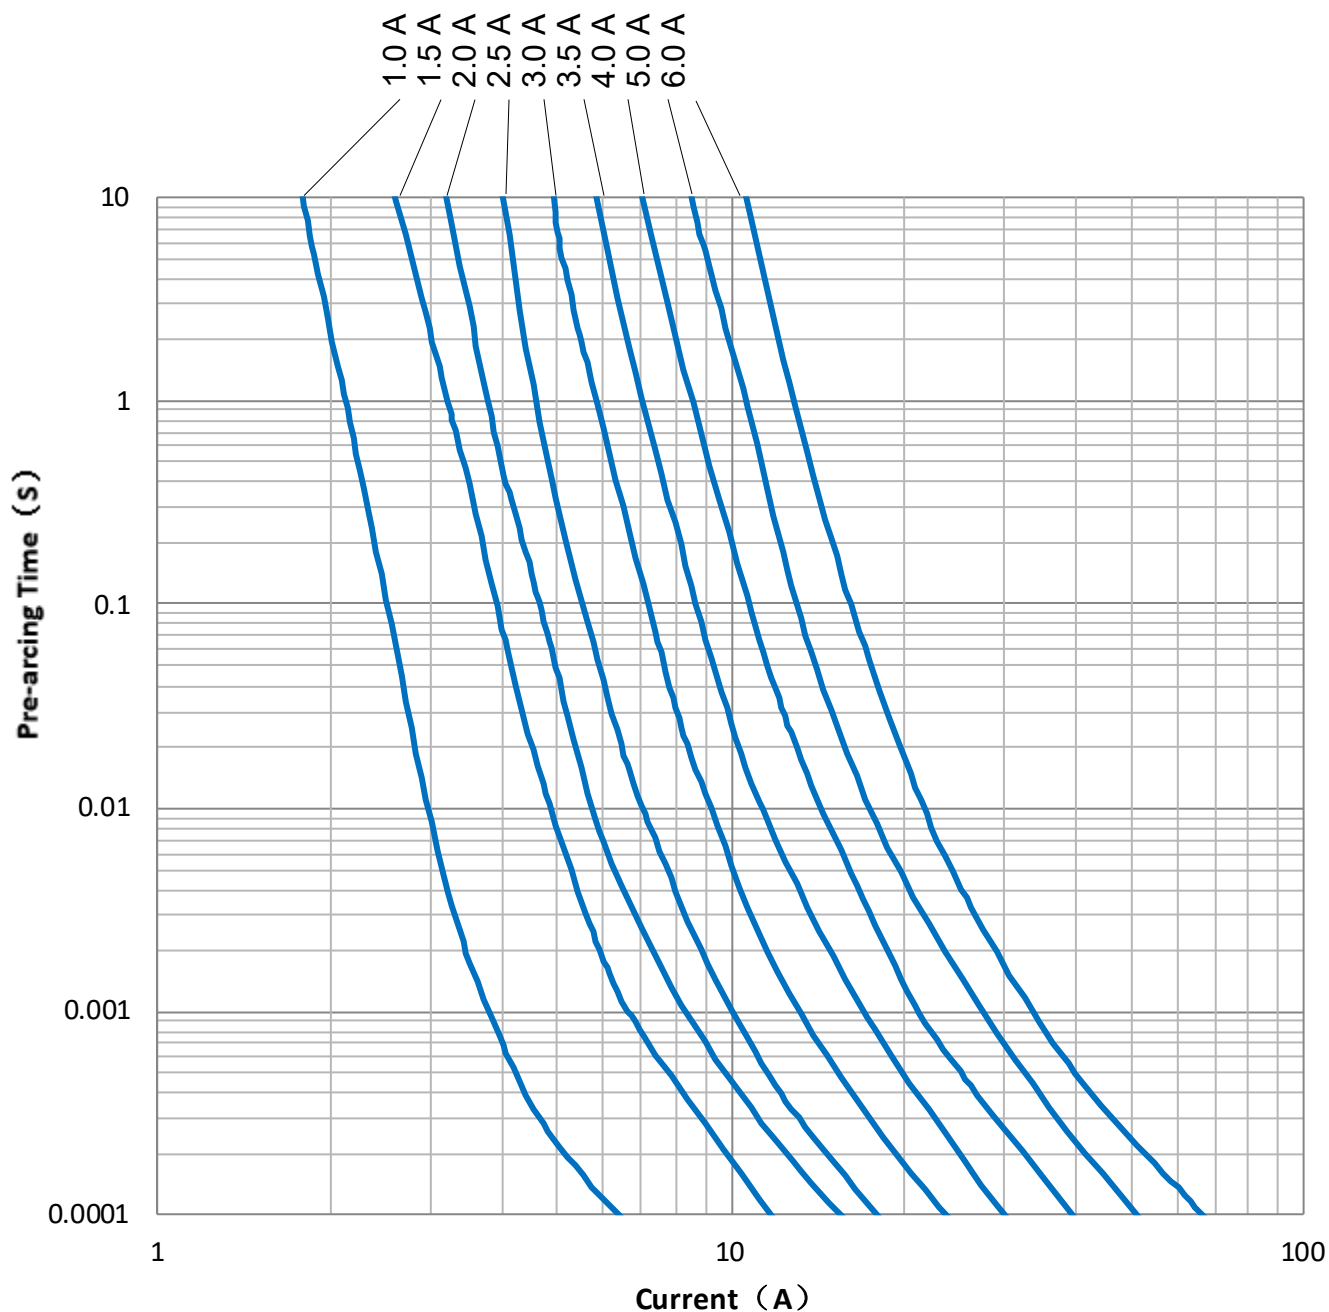

SolidMatrix® Automotive Surface Mount Fuses QF0603F Series

Average I^2t vs. t Curves:

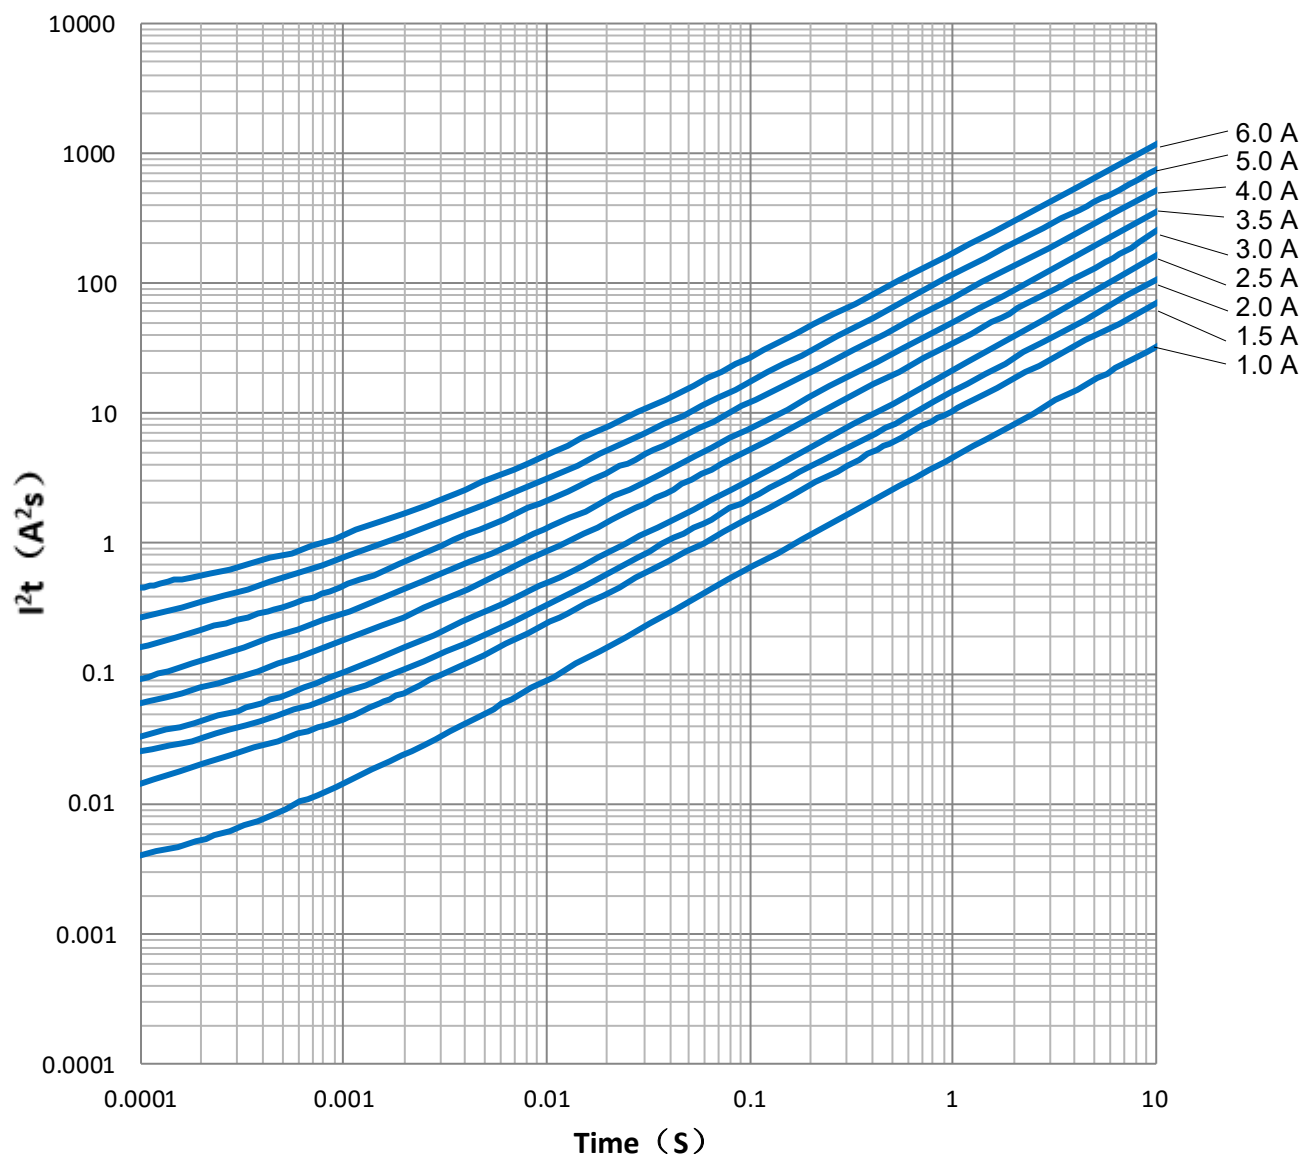

SolidMatrix® Automotive Surface Mount Fuses

QF1206H Series




Agency Approval:

| Agency | File NO. |
|--------|----------|
| UL | E232989 |

Shape and Dimensions:

| Unit | Inch | mm |
|------|---------------|-------------|
| L | 0.126 ± 0.008 | 3.20 ± 0.20 |
| W | 0.063 ± 0.008 | 1.60 ± 0.20 |
| T | 0.038 ± 0.008 | 0.97 ± 0.20 |
| B | 0.020 ± 0.010 | 0.51 ± 0.25 |



Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C | |
|---------------------|-----------------------|------------|
| | Min. | Max. |
| 100% | 4 hours | |
| 200% (1-6A) | 1 second | 60 seconds |
| 350% (0.5-0.75A) | | 5 seconds |

Ordering Information:


| Part Number | Current Rating (A) | Voltage Rating (VDC) | Interrupting Ratings | Nominal Cold DCR (Ω) ¹ | Nominal I^2t (A^2s) ² | Marking Code ³ |
|--------------|--------------------|----------------------|----------------------|--|--|---------------------------|
| QF1206HA500T | 0.5 | 65 | 50A @ 65VDC | 0.980 | 0.035 | C |
| QF1206HA750T | 0.75 | | | 0.420 | 0.100 | D |
| QF1206H1A00T | 1.0 | 63 | 50A @ 63VDC | 0.370 | 0.112 | E |
| QF1206H1A50T | 1.5 | | | 0.165 | 0.336 | G |
| QF1206H2A00T | 2.0 | | | 0.089 | 0.820 | I |
| QF1206H2A50T | 2.5 | 32 | 50A @ 32VDC | 0.067 | 1.210 | J |
| QF1206H3A00T | 3.0 | | | 0.039 | 1.360 | K |
| QF1206H3A50T | 3.5 | | | 0.030 | 1.890 | L |
| QF1206H4A00T | 4.0 | | | 0.025 | 2.780 | M |
| QF1206H4A50T | 4.5 | | | 0.023 | 3.250 | T |
| QF1206H5A00T | 5.0 | | | 0.020 | 7.500 | N |
| QF1206H6A00T | 6.0 | 24 | 80A @ 24VDC | 0.013 | 12.80 | O |

- Measured at ≤ 10% rated current and 25°C ambient.
- Melting I^2t at 1000% of current rating.
- Green Marking Character Code.

SolidMatrix® Automotive Surface Mount Fuses


QF1206H Series

Average Pre-arcing Time Curves:

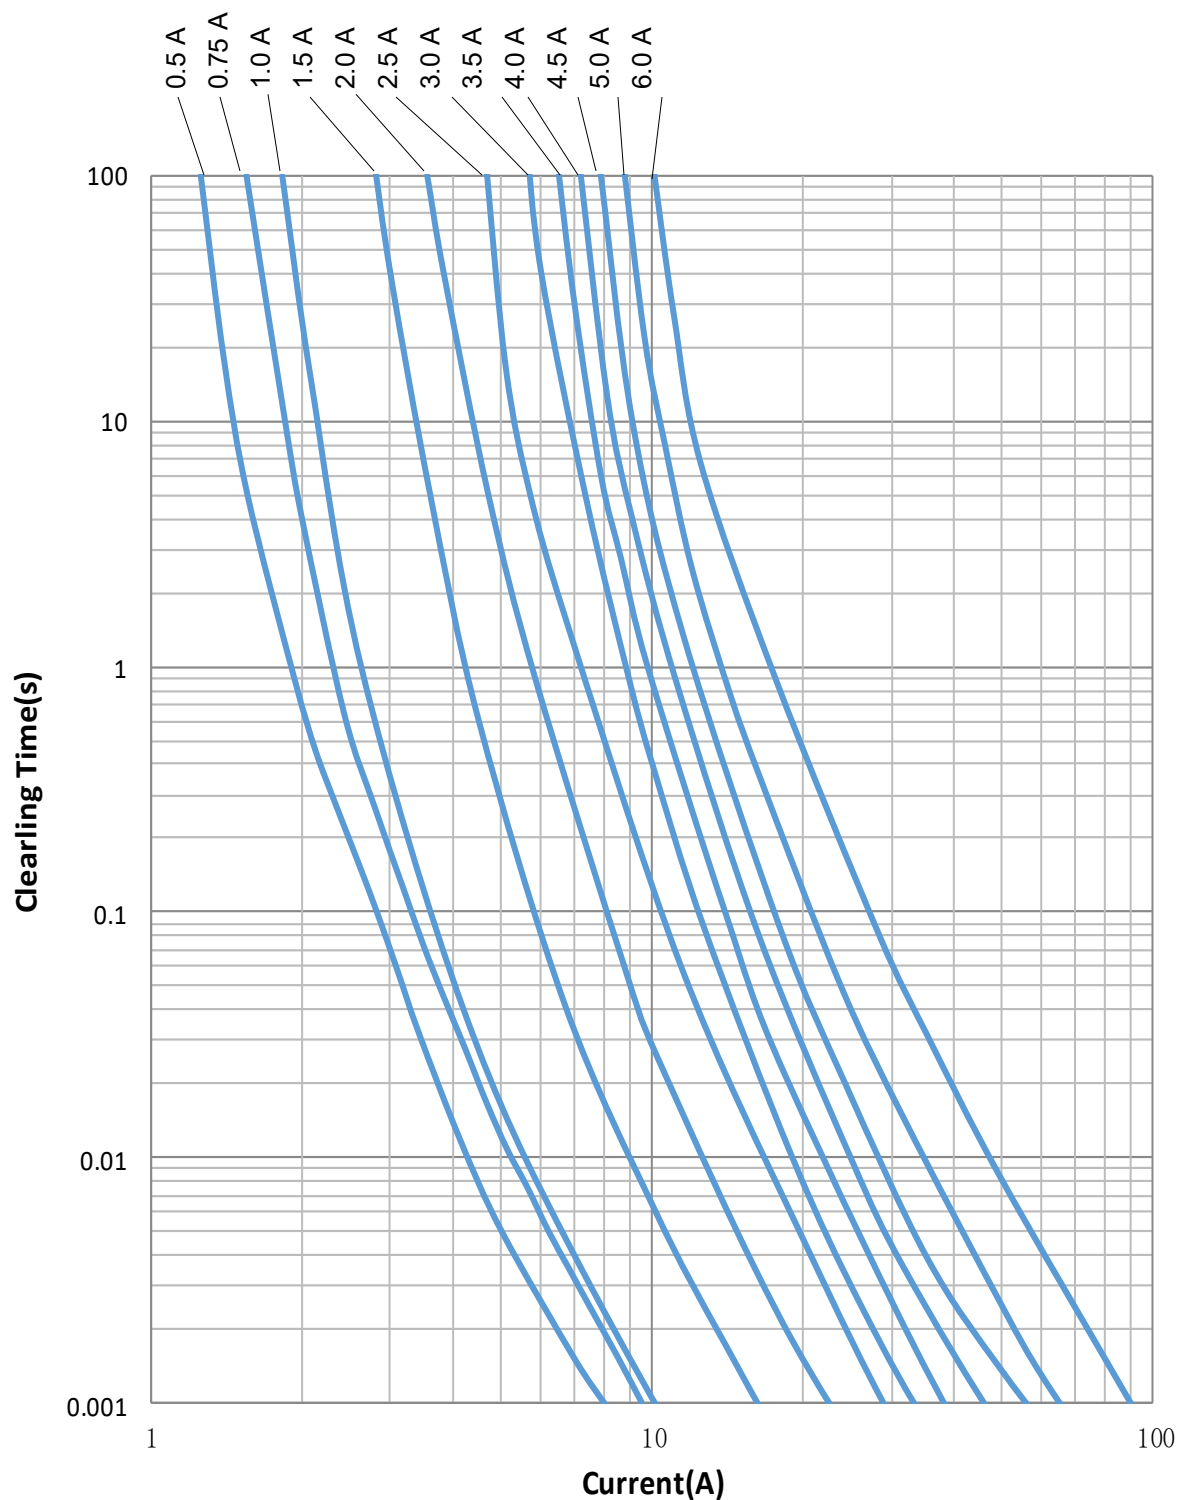

SolidMatrix[®] Automotive Surface Mount Fuses QF1206H Series

Average I^2t vs. t Curves:

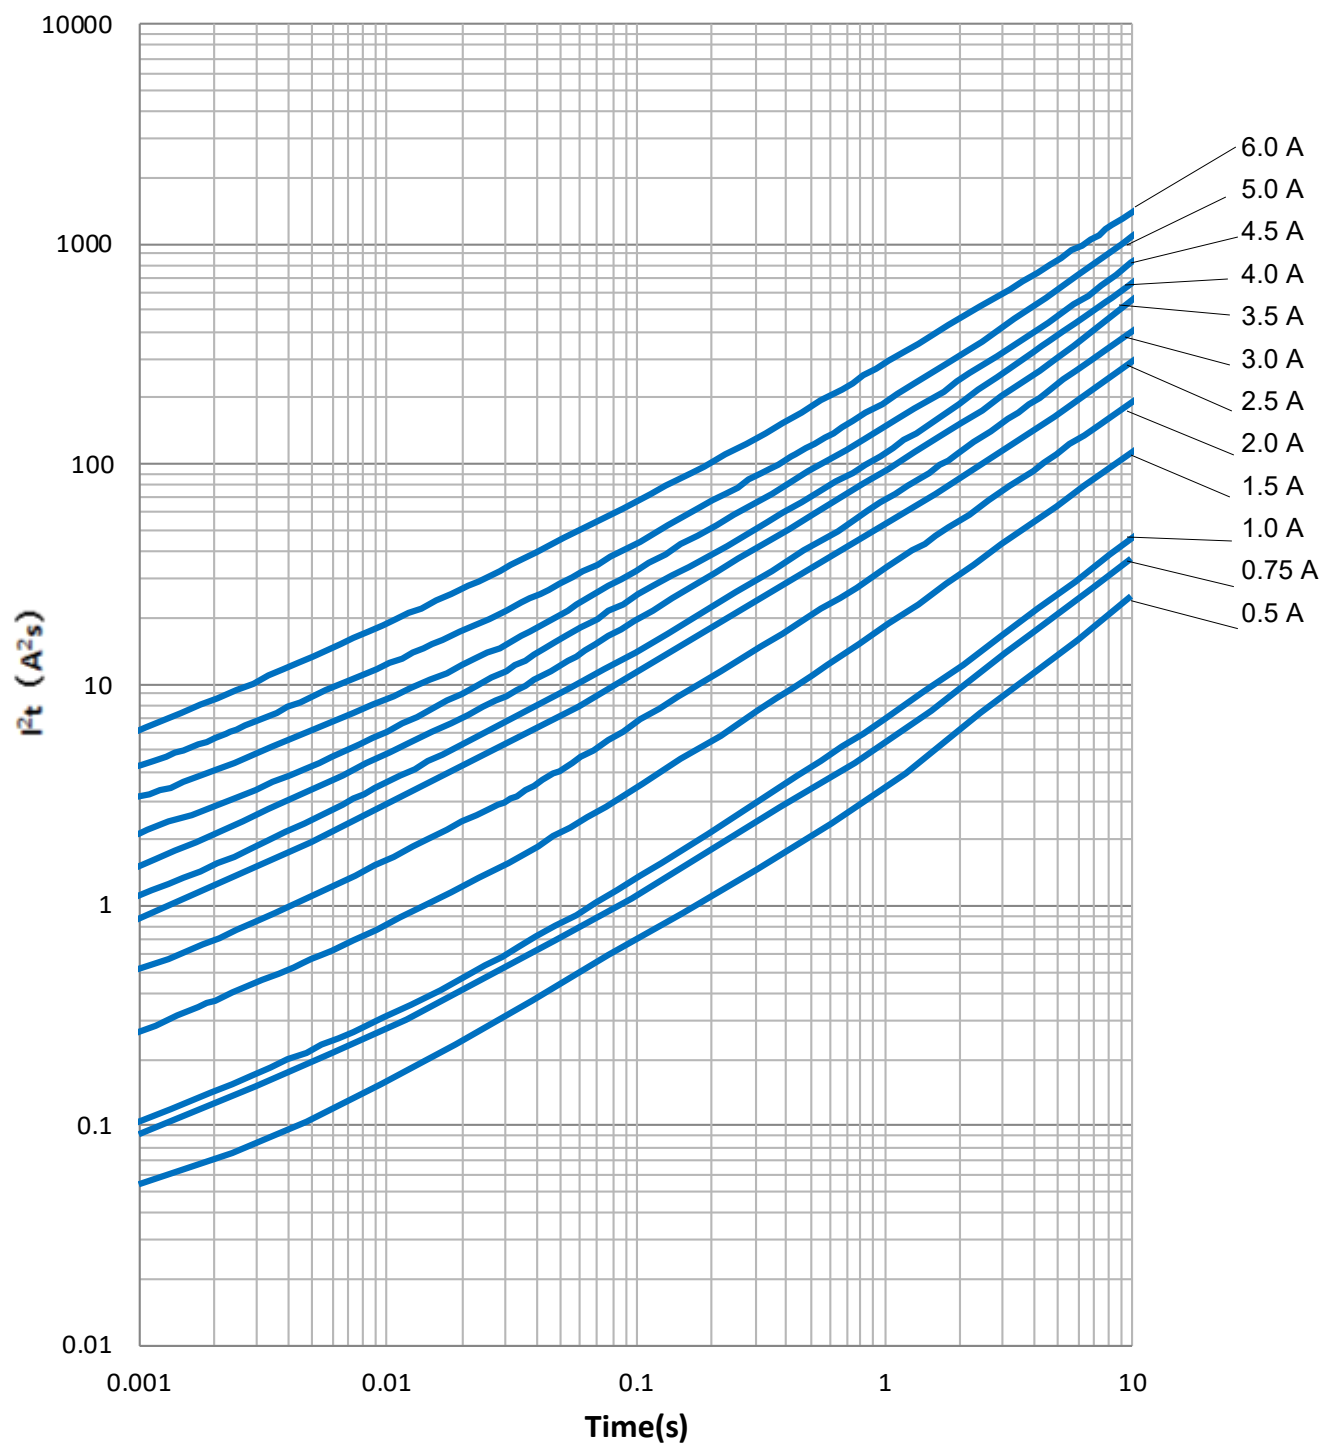

SolidMatrix® Automotive Surface Mount Fuses

QF0603H Series




Agency Approval:

| Agency | File NO. |
|--------|----------|
| UL | E232989 |

Shape and Dimensions:

| Unit | Inch | mm |
|------|-------------------|-----------------|
| L | 0.063 ± 0.006 | 1.60 ± 0.15 |
| W | 0.031 ± 0.006 | 0.80 ± 0.15 |
| T | 0.031 ± 0.006 | 0.80 ± 0.15 |
| B | 0.014 ± 0.006 | 0.36 ± 0.15 |



Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C | |
|---------------------|-----------------------|------------|
| | Min. | Max. |
| 100% | 4 hours | |
| 200% | 1 second | 60 seconds |


Ordering Information:

| Part Number | Current Rating (A) | Voltage Rating (VDC) | Interrupting Ratings | Nominal Cold DCR (Ω) ¹ | Nominal I^2t (A^2s) ² | Marking Code ³ |
|--------------|--------------------|----------------------|----------------------|--|--|---------------------------|
| QF0603H1A00T | 1.0 | 32 | 50A @ 32VDC | 0.240 | 0.082 | E |
| QF0603H1A50T | 1.5 | | | 0.115 | 0.112 | G |
| QF0603H2A00T | 2.0 | | | 0.060 | 0.245 | I |
| QF0603H2A50T | 2.5 | | | 0.042 | 0.570 | J |
| QF0603H3A00T | 3.0 | | | 0.032 | 0.740 | K |
| QF0603H3A50T | 3.5 | | | 0.022 | 1.120 | L |
| QF0603H4A00T | 4.0 | | | 0.018 | 2.10 | M |
| QF0603H4A50T | 4.5 | | | 0.015 | 2.68 | T |
| QF0603H5A00T | 5.0 | | | 0.013 | 3.30 | N |

- Measured at $\leq 10\%$ rated current and 25°C ambient.
- Melting I^2t at 1000% of current rating.
- Green Marking Character Code.


SolidMatrix[®] Automotive Surface Mount Fuses QF0603H Series

Average I^2t vs. t Curves:

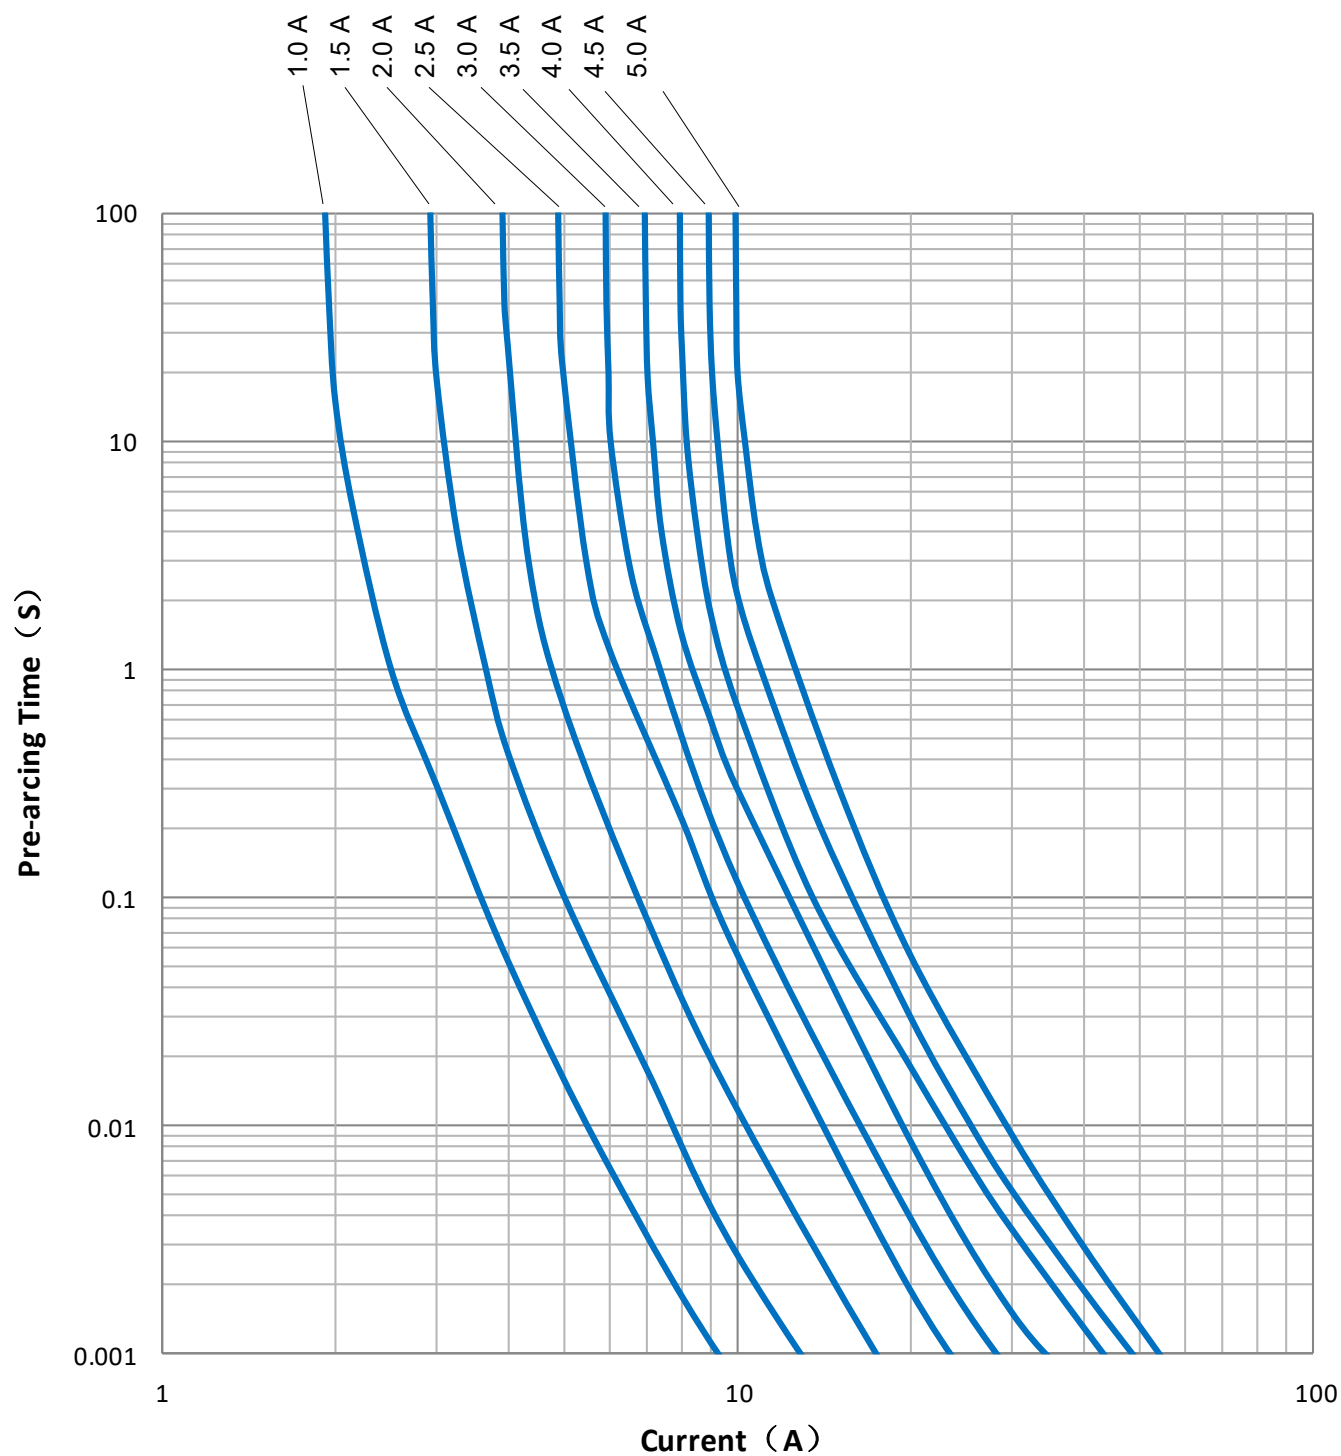

SolidMatrix[®] Automotive Surface Mount Fuses QF0603H Series

Average I^2t vs. t Curves:

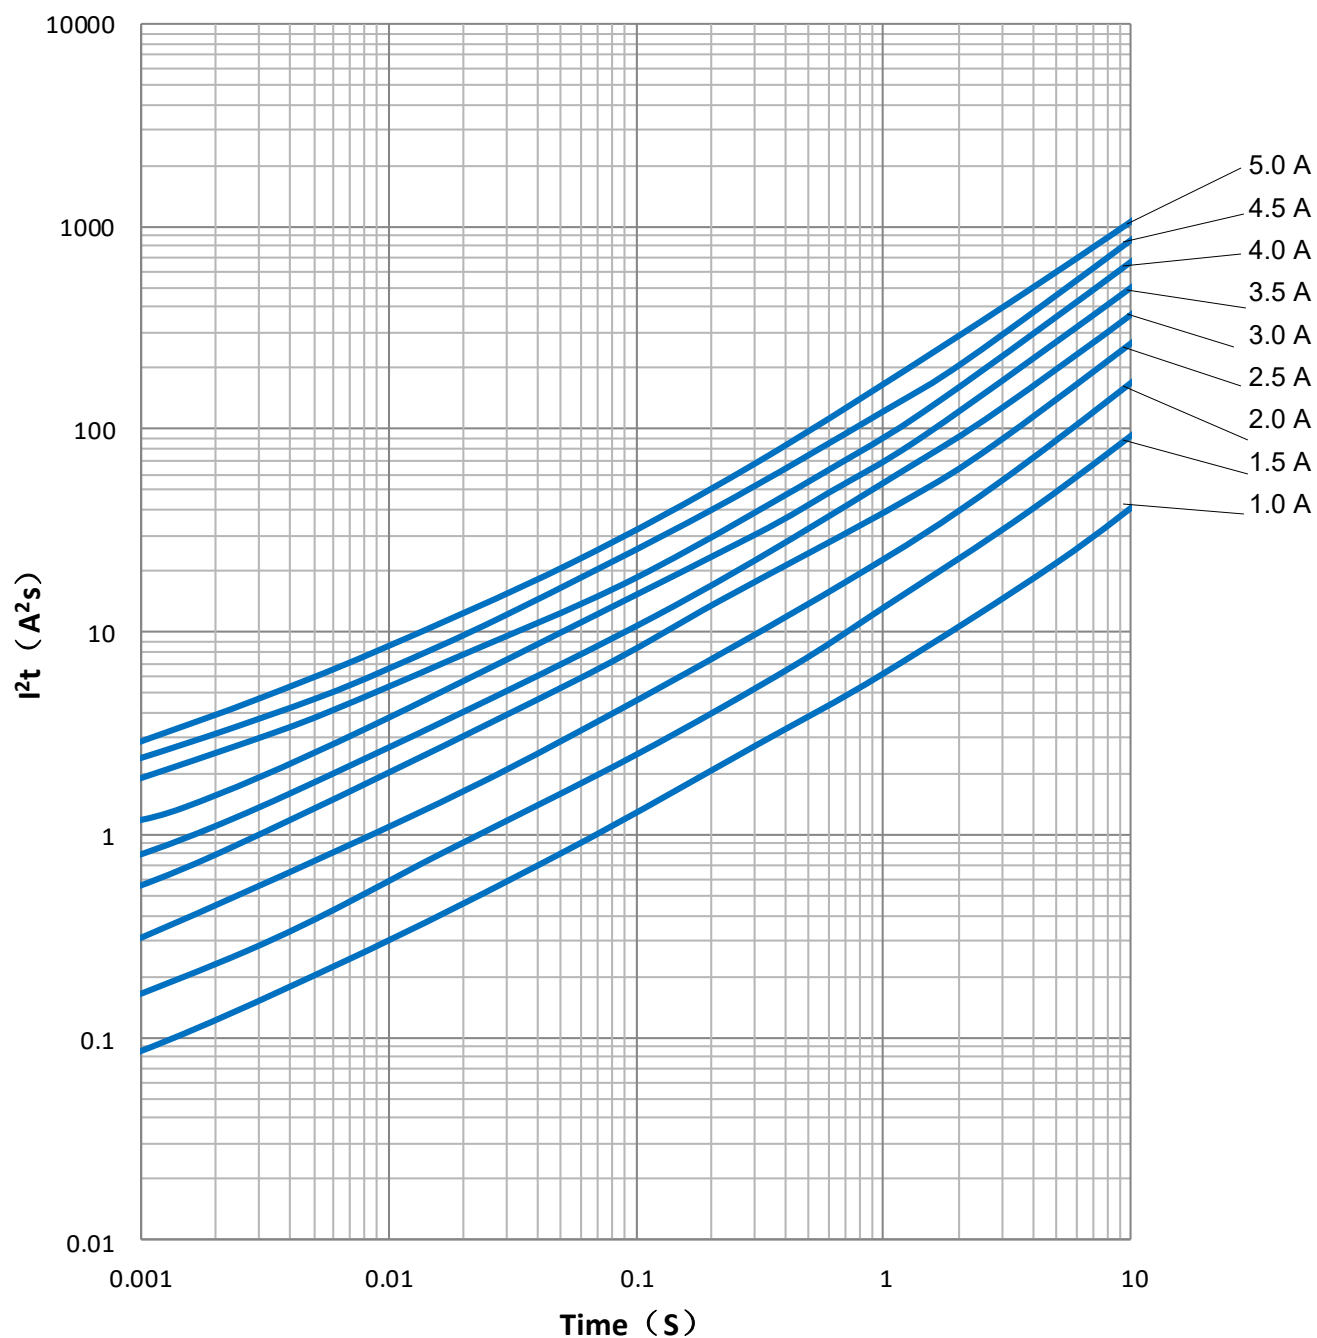

High Power Surface Mount Fuse

QM2822H Series



Features:

- Solid body structure, sealed for harsh environments
- High interrupting ratings – for excellent inrush current capability
- High reliability for long time operation
- Current ratings from 20A to 125A at 2822 case size
- Voltage ratings from 48Vdc to 125Vdc
- Automotive grade with AEC-Q200 qualification
- Halogen free, RoHS compliant and 100% lead-free

Clearing Time Characteristics:

| % of Current Rating | Clearing Time at 25°C | |
|---------------------|-----------------------|------------|
| | Min. | Max. |
| 100% | 4 hours | |
| 250% | | 60 seconds |

Shape and Dimensions:


| Unit | Inch | mm |
|------|---------------|-----------|
| L | 0.287 ± 0.012 | 7.3 ± 0.3 |
| W | 0.228 ± 0.008 | 5.8 ± 0.2 |
| T | 0.165 ± 0.008 | 4.2 ± 0.2 |
| B | 0.051 ± 0.012 | 1.3 ± 0.3 |

Applications:

- Server Systems
- UPS & Routers and Switches
- Telecom DC/DC Power
- Drones
- Power tools
- EV Battery Power Systems

Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E507943.

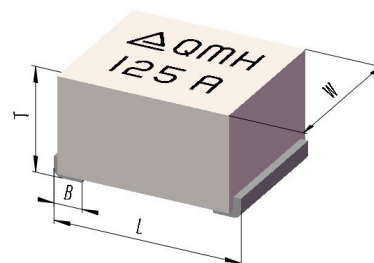

Ordering Information:


| Part Number | Current Rating (A) | Voltage Rating (Vdc) | Interrupting Rating | Nominal DCR (mΩ) ¹ | Nominal I ² t (A ² s) ² | Marking ⁴ |
|--------------|--------------------|----------------------|--|-------------------------------|--|----------------------|
| QM2822H20A0T | 20 | 125 | 300A @125Vdc 1,000A @ 75Vdc ³ 1,500A @ 48Vdc ³ | In Pending | NA | NA |
| QM2822H30A0T | 30 | | | In Pending | NA | NA |
| QM2822H40A0T | 40 | | | 1.05 | 400 | Δ QMH 40 A |
| QM2822H50A0T | 50 | | | 0.85 | 600 | Δ QMH 50 A |
| QM2822H60A0T | 60 | 75 | 1,000A @ 75Vdc ³ 1,500A @ 48Vdc ³ | 0.74 | 900 | Δ QMH 60 A |
| QM2822H70A0T | 70 | | | 0.61 | 1,400 | Δ QMH 70 A |
| QM2822H80A0T | 80 | | | 0.53 | 2,000 | Δ QMH 80 A |
| QM2822H90A0T | 90 | | | 0.48 | 2,400 | Δ QMH 90 A |
| QM2822H100AT | 100 | | | 0.44 | 3,600 | Δ QMH 100 A |
| QM2822H125AT | 125 | | | 0.38 | 6,000 | Δ QMH 125 A |

1. Measured at ≤10% rated current and 25 °C ambient
2. Melting I²t at 10x I_n
3. Time constant of interrupting test less than 0.1ms
4. Black marketing character code or laser marking code

High Power Surface Mount Fuse


QM2822H Series

Clearing Time vs. Current Curves:

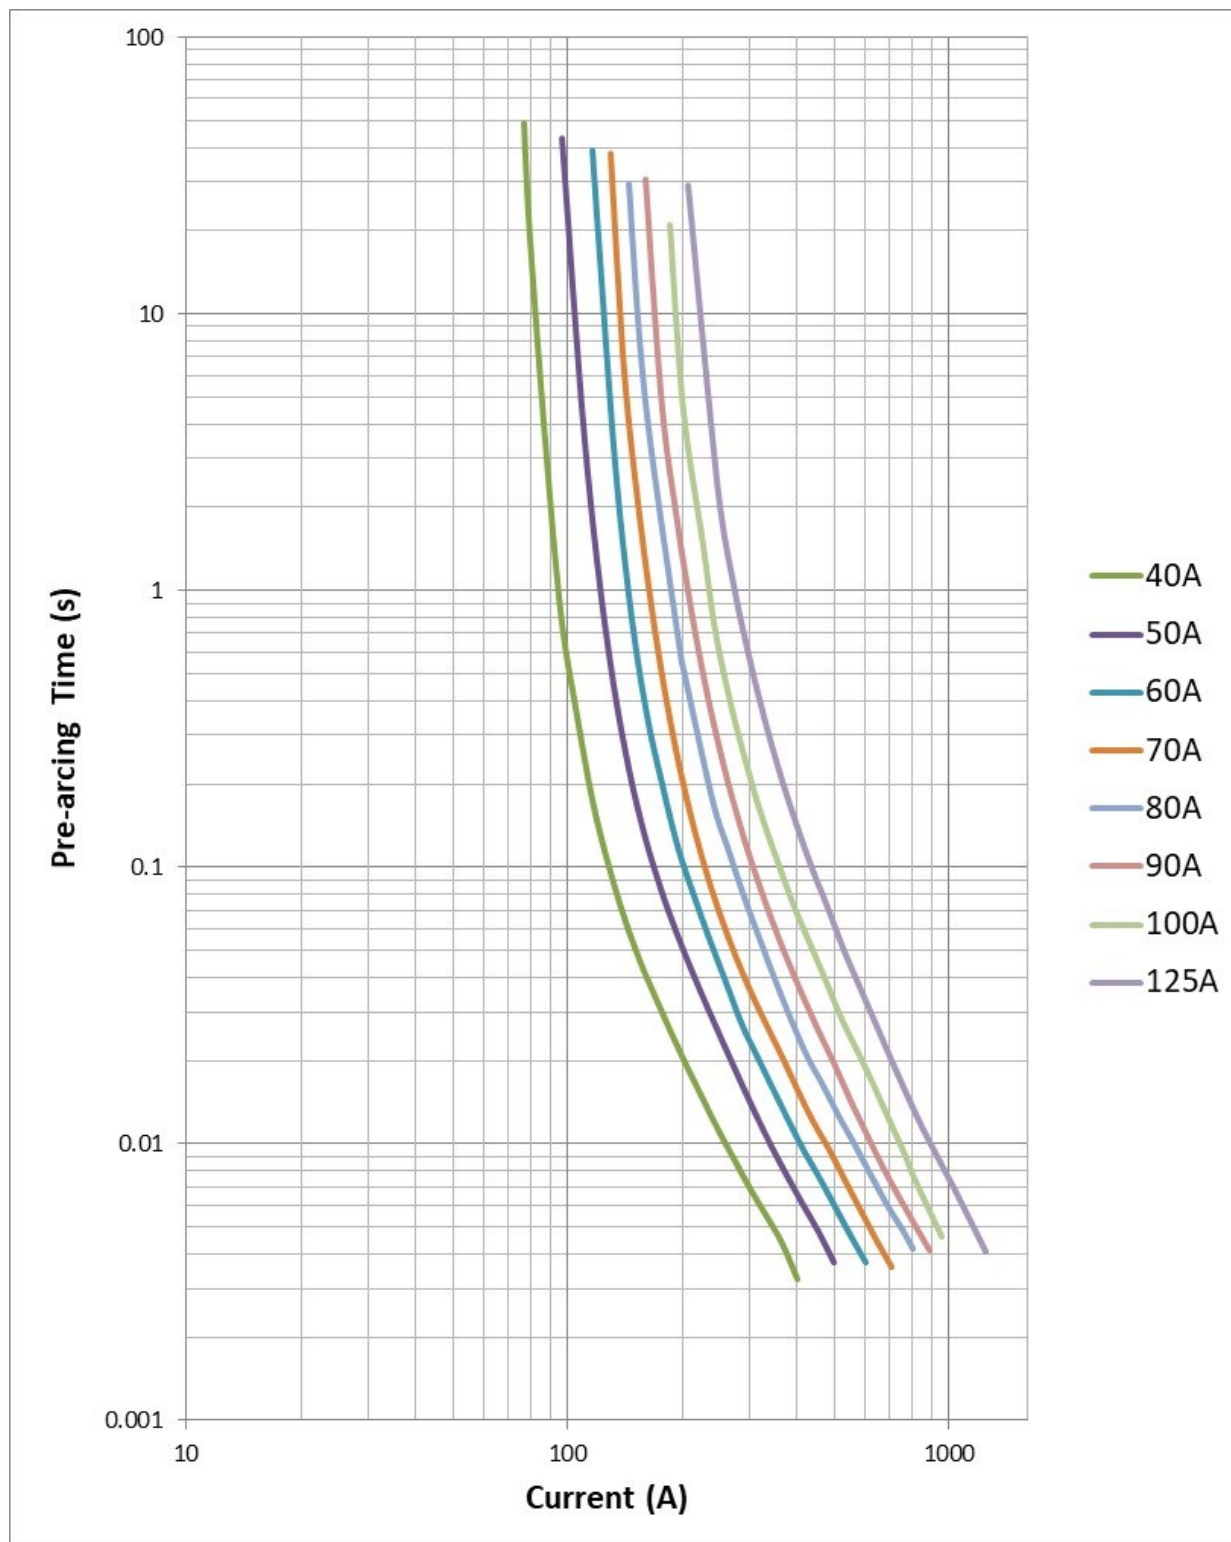

High Power Surface Mount Fuse QM2822H Series

Average I^2t vs. t Curves:

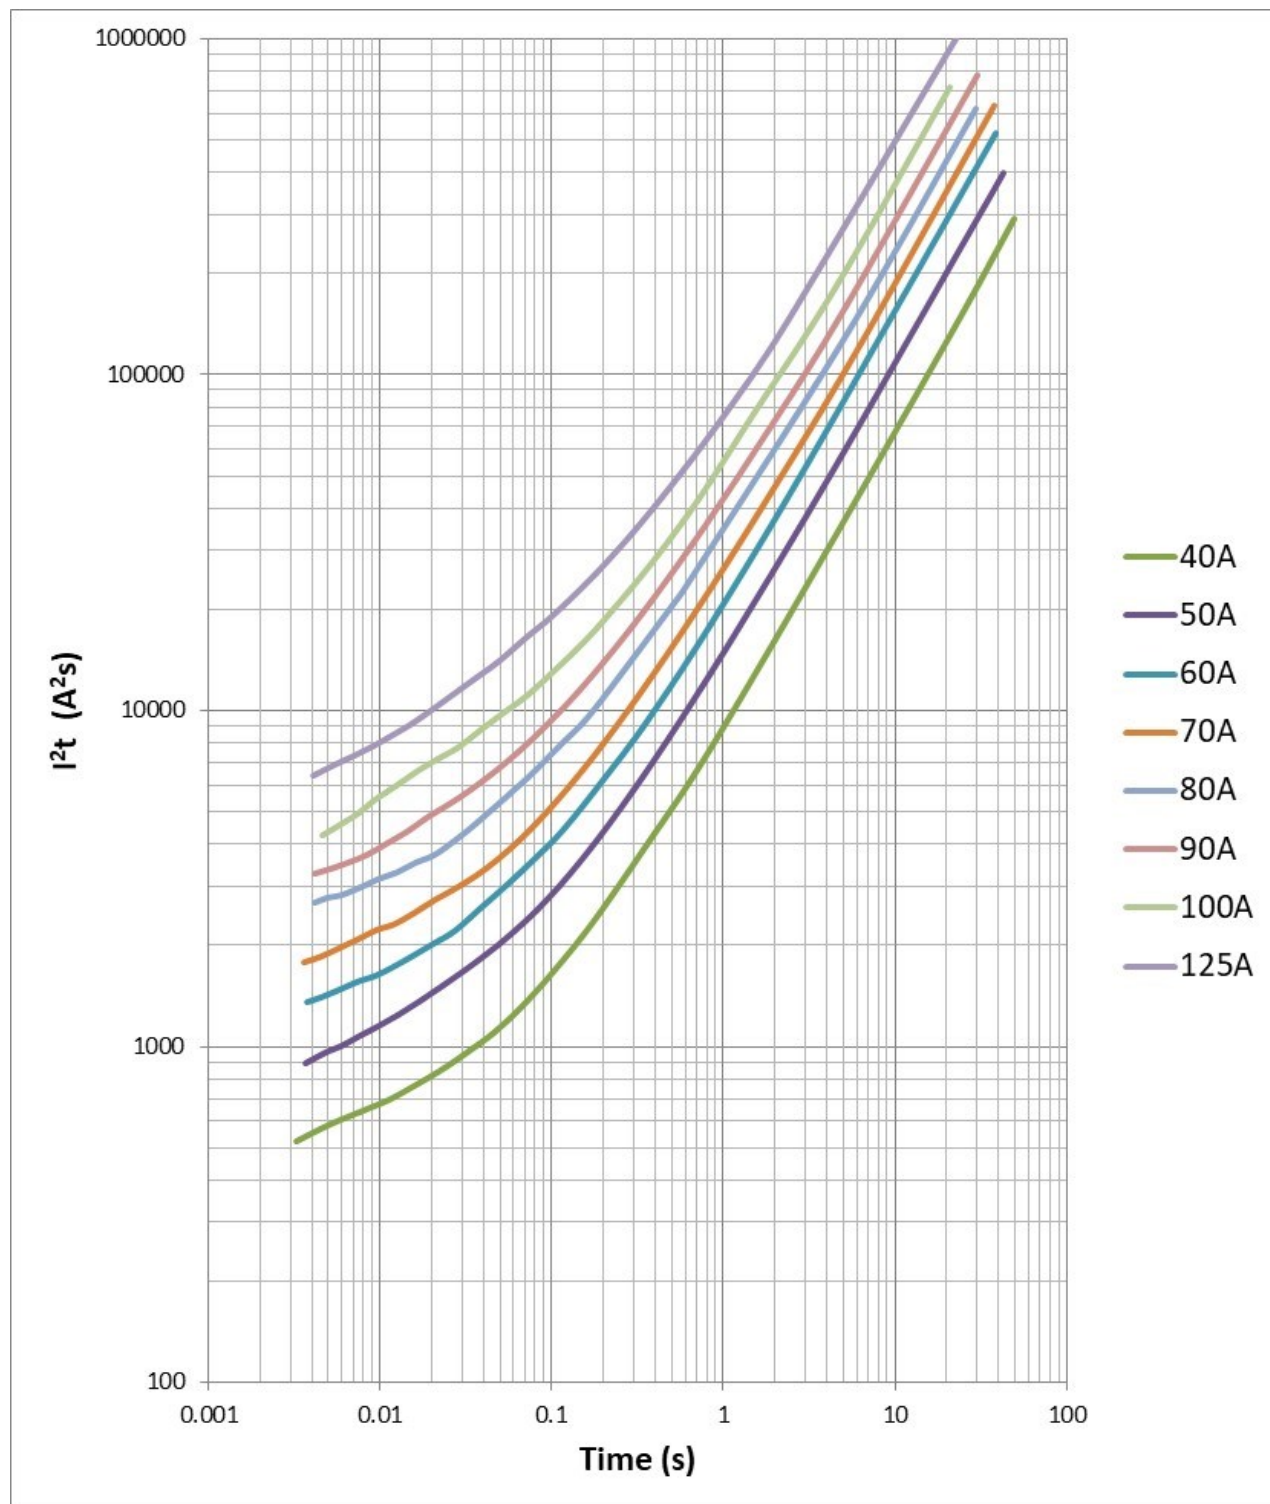


High Power Surface Mount Fuse

QM2822H Series

Product Identification:


QM 2822 H 60A0 T
(1) (2) (3) (4) (5)

- (1) **Product Code:** QM-Automotive Molding Fuse
- (2) **Size code: L x W (inch):** the first two digits - L (length), the last two digits - W (width)
- (3) **Series code:** H
- (4) **Current rating code:** e.g. 60A0: 60.0A
- (5) **Package code:** T - Tape & Reel, B - Bulk

Marking: Top Line:  AEM Logo; **QMH:** QM2822H Series
Bottom Line: Current Rating Code

Recommended Land Pattern:

| | |
|--------------------|-------------|
| Chip Size | 2822 (7358) |
| L Inch (mm) | 0.386 (9.8) |
| G Inch (mm) | 0.173 (4.4) |
| H Inch (mm) | 0.228 (5.8) |

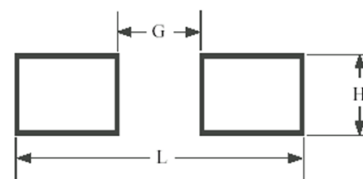

Reliability Tests:


| Item | Test Condition | Criteria |
|---------------------------------|---|---|
| High temperature storage | Subject fuses to +125°C for 1000 hours | DCR change within ±20%, no observed damage |
| Low temperature storage | Subject fuses to -65°C for 1000 hours | DCR change within ±20%, no observed damage |
| Temperature Cycling | Subject fuses to 1000 temperature cycles, 30min at -65°C lowest temp and 30min at +125°C highest temp | DCR change within ±20%, no mechanical damage |
| Biased Humidity | Subject fuses to +85°C/85%RH with 10% rated current for 1000 hours | DCR change within ±20%, no excessive corrosion |
| High Temperature Operating Life | +125°C for 1000 hours. Load setting : 75%(current de-rating)*60%(temp. de-rating)*Rated current | DCR change within ±20%, no observed damage |
| Mechanical Vibration | 0.4" D.A. or 30G between 5 and 3000 Hz, along 3 mutually perpendicular axes for a total of 12 hours | DCR change within ±20%, no mechanical damage |
| Mechanical Shock | 1500G, 0.5 ms, half sine shocks in 6 major directions along 3 mutually perpendicular axes | DCR change within ±20%, no mechanical damage |
| Resistance to Soldering Heat | One dip at 260°C, 10 seconds | DCR change within ±20%, new solder coverage 75% minimum, no mechanical damage |
| Salt Spray | 5% salt solution, 48 hours exposure | DCR change within ±20%, no excessive corrosion |
| Solderability | 245°C, 5 seconds | New solder coverage 95% minimum |
| Terminal Strength | Apply 17.7N (1.8kg) force gradually to the side of the fuse, this force shall be applied for 60 seconds | DCR change within ±20%, no mechanical damage |
| Board Flex | Apply a force that will bend the board distance of x=2mm, and the duration of the applied force shall be 60 seconds | DCR change within ±20%, no mechanical damage |

Fuse Selection and Temperature De-rating Guideline:

The ambient temperature affects the current carrying capacity of fuses. When a fuse is operating at a temperature higher than 25°C, the fuse shall be “de-rated” according to the de-rating curve.

Packaging:

| Chip Size | Parts on 13 inch (330 mm) Reel |
|-----------|--------------------------------|
| 2822 | 1,000 pcs |

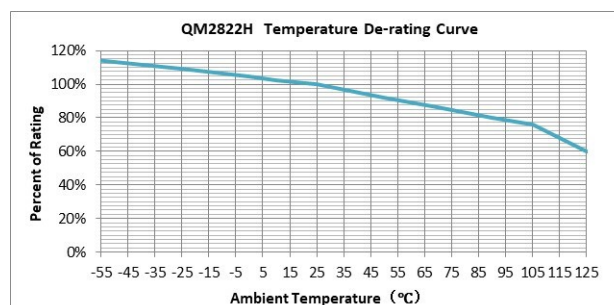


High Power Surface Mount Fuse

QM2822H Series

Recommended Temperature Profile for Reflow Soldering:

| Profile Feature | Pb-Free Assembly |
|---|----------------------------------|
| Preheat/Soak Temperature Min (T_{smin}) Temperature Max (T_{smax}) Time (t_s) from (T_{smin} to T_{smax}) | 150°C 200°C 60~120 seconds |
| Ramp-up rate (T_L to T_p) | 3°C/second max. |
| Liquidous temperature (T_L) Time(t_L) maintained above T_L | 217°C 60~150 seconds |
| Peak package body temperature (T_p) | 260°C |
| Time (t_p)*within 5°C of the specified classification temperature (T_c) | 30 seconds * |
| Ramp-down rate (T_p to T_L) | 6°C/second max. |
| Time 25°C to peak temperature | 8 minutes max. |
| * Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum | |

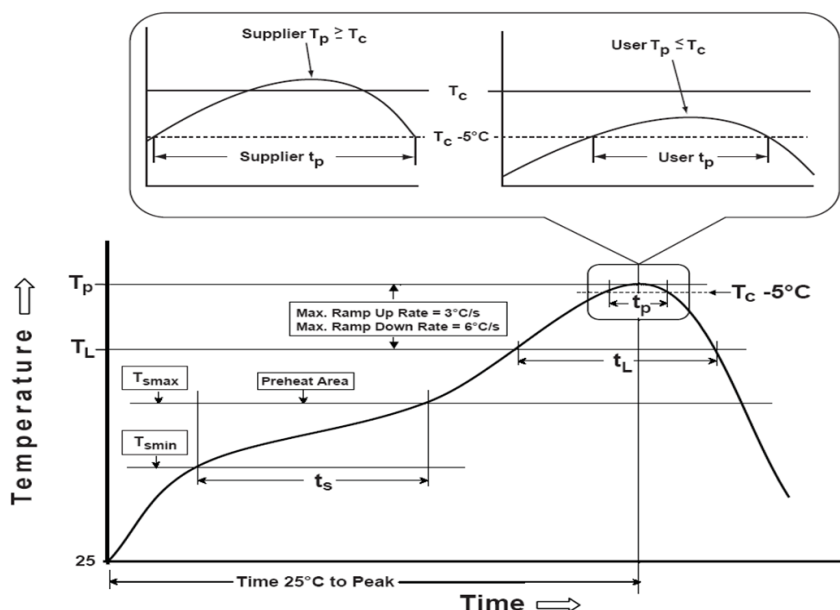

Recommended conditions for hand soldering:


1. Appropriate temperature (max.) of soldering iron tip/soldering time (max.): 280°C /10 s or 350°C / 3 s
2. Using hot air rework station with tip that can melt the solder on both terminations at the same time is strongly recommended. Do not directly contact the chip termination with the tip of soldering iron.

Storage:

1. The maximum ambient temperature shall not exceed 35°C . Storage temperatures higher than 35°C could result in the deformation of packaging materials.
2. The maximum relative humidity recommended for storage is 75%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components.
3. The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.
4. MSL=1

Disclaimer

Specifications are subject to change without notice. AEM products are designed for specific applications and should not be used for any purpose (including, without limitation, automotive, aerospace, medical, life-saving applications, or any other application which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property) not expressly set forth in applicable AEM product documentation. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Warranties granted by AEM shall be deemed void for products used for any purpose not expressly set forth in applicable AEM product documentation. AEM shall not be liable for any claims or damages arising out of products used in applications not expressly intended by AEM as set forth in applicable AEM product documentation. The sale and use of AEM products is subject to AEM terms and conditions of sale. Please refer to AEM's website for updated catalog and terms and conditions of sale.

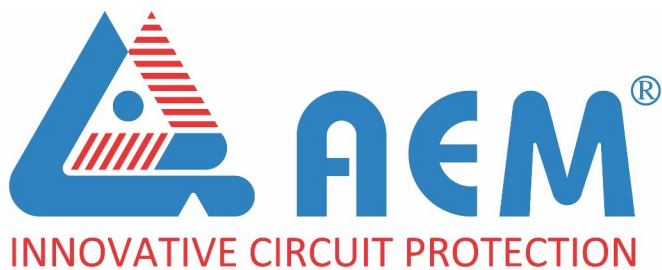

AEM Components (Suzhou) Co., Ltd

**461 Zhongnan Street,
China-Singapore Suzhou Industrial Park
Jiangsu, P. R. China, 215026**

Tel: 86-512-6258-0028
Fax: 86-512-6258-0018
Email: marketing@aemchina.com
sales@aemchina.com

AEM Components (USA), Inc.

6670 Cobra Way, San Diego, CA 92121, USA

Tel: 1-858-750-6100
Fax: 1-858-481-1123
Email: sales@aemcomponents.com

Websites: www.aemeee.com & www.aemcomponents.com & www.aemchina.com