

Surface Mount Polymer PTC PBS Series, 2018 Size

Features:

- Resettable over-current protection
- Fast time-to-trip
- RoHS compliant
- Halogen free

Applications:

- Battery packs
- Portable electronic devices
- Industrial controls
- Multimedia
- Game machines
- Telecom & broadband instruments

Ordering Code:

PBS 2018-260-24 F

(1) (2) (3) (4) (5)


- (1) Series code
- (2) Size code
- (3) Current rating code
260: 2.6A
- (4) Rating voltage code
24: 24Vdc
- (5) Identification code

Agency Approval:

UL file number: E355716

TÜV certification number: R50371797, R50371842 and R50385152. Tested for EN60738-1: 2006+A1; EN60738-1:2008; EN60730-1: 2011 clause 15, 17 and Annex J.

Product Dimensions:

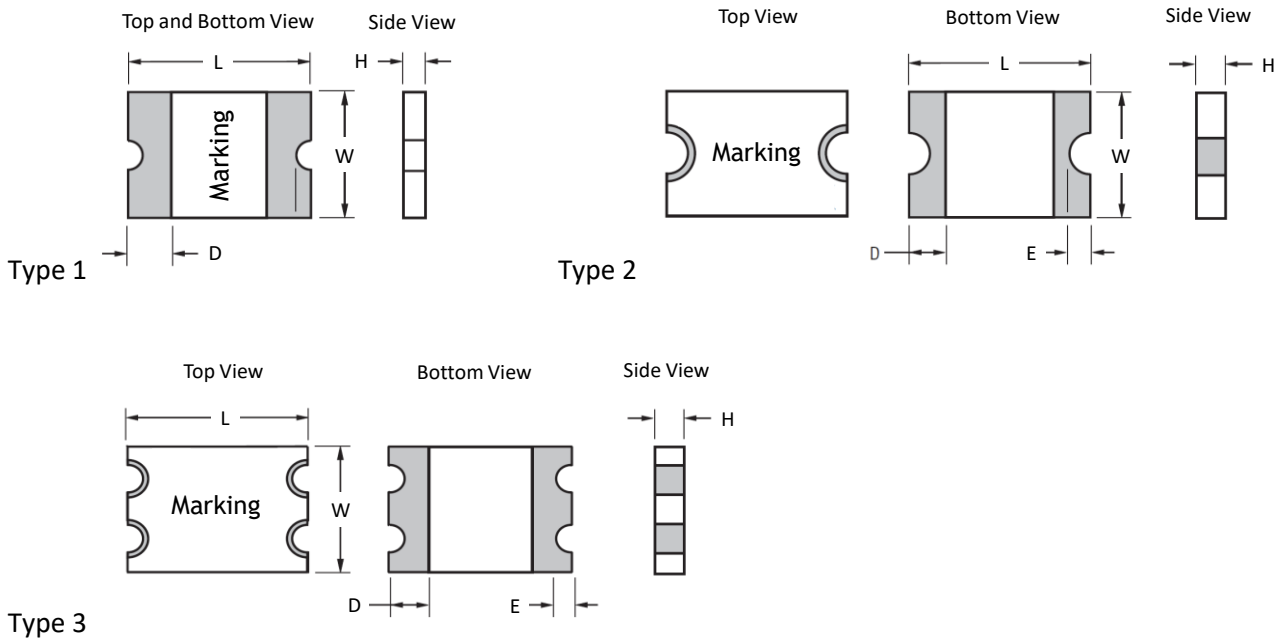

Part Number	Type	L mm (inches)		W mm (inches)		H mm (inches)		D mm (inches)	E mm (inches)	
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Max.
PBS2018-050	1	4.72 (0.186)	5.44 (0.214)	4.22 (0.166)	4.93 (0.194)	0.79 (0.031)	1.09 (0.043)	0.30 (0.012)	NA	NA
PBS2018-100-33F	2	4.72 (0.186)	5.44 (0.214)	4.22 (0.166)	4.93 (0.194)	0.70 (0.028)	1.25 (0.049)	0.30 (0.012)	0.25 (0.010)	0.70 (0.028)
PBS2018-150 PBS2018-200	1	4.72 (0.186)	5.44 (0.214)	4.22 (0.166)	4.93 (0.194)	0.55 (0.022)	0.85 (0.033)	0.30 (0.012)	NA	NA
PBS2018-260-24F	3	4.72 (0.186)	5.44 (0.214)	4.22 (0.166)	4.93 (0.194)	0.70 (0.028)	2.00 (0.079)	0.30 (0.012)	0.25 (0.010)	0.70 (0.028)

Typical Ratings and Characteristics (@ 23°C):

✧ Operating temperature: -40 to +85°C

Part Number	Current (A)		V _{Max} (Vdc)	I _{Max} (A)	Max. Time to Trip (sec)		Typical Power (Pd, W)	Resistance Min. (Ω)	One Hours Post Reflow Resistance R ₁ Max. (Ω) ¹
	Hold (I _H)	Trip (I _T)			Current (A)	Time (sec)			
PBS2018-050	0.55	1.20	60	10	2.5	3.0	0.9	0.200	1.00
PBS2018-100-33F	1.10	2.20	33	40	8.0	0.5	1.4	0.060	0.40
PBS2018-150	1.50	3.00	15	40	8.0	0.8	1.1	0.050	0.17
PBS2018-200	2.00	4.00	10	40	8.0	2.4	1.1	0.030	0.100
PBS2018-260-24F	2.60	5.20	24	20	8.0	0.8	1.1	0.015	0.075

¹ The max resistance of one-hour post reflow is a reference value. The value may change a little according to reflow conditions and soldering state.

Packaging and Marking Information:

Part Number	Type	Part Marking	Tape & Reel Quantity (piece)
PBS2018-050	1	50yw	6,000
PBS2018-100-33F	2	6w	
PBS2018-150	1	15yw	
PBS2018-200	1	20yw	
PBS2018-260-24F	3	Dw	4,000

Type 1: 50yw → 50 = 0.50A; y = Year code (y=7 → 2017); w = Week code (w=Y → week 49~50)


Type 2: 6w → 6 = 1.1A; w = Week code (w=Y → week 49~50)

Type 3: Dw → D = 2.6A; w = Week code (w=Y → week 49~50)


Thermal De-rating Hold Current (A) at Ambient Temperature (23°C):

Part Number	Ambient temperature								
	-40°C	-20°C	0°C	23°C	40°C	50°C	60°C	70°C	85°C
PBS2018-050	0.87	0.77	0.67	0.55	0.46	0.41	0.36	0.31	0.23
PBS2018-100-33F	1.66	1.47	1.29	1.10	0.91	0.83	0.73	0.64	0.50
PBS2018-150	2.38	2.10	1.82	1.50	1.27	1.13	0.99	0.85	0.64
PBS2018-200	2.95	2.65	2.35	2.00	1.74	1.59	1.44	1.29	1.06
PBS2018-260-24F	3.75	3.35	3.00	2.60	2.35	2.15	2.05	1.80	1.50

Typical Time to Trip (@ 23°C):

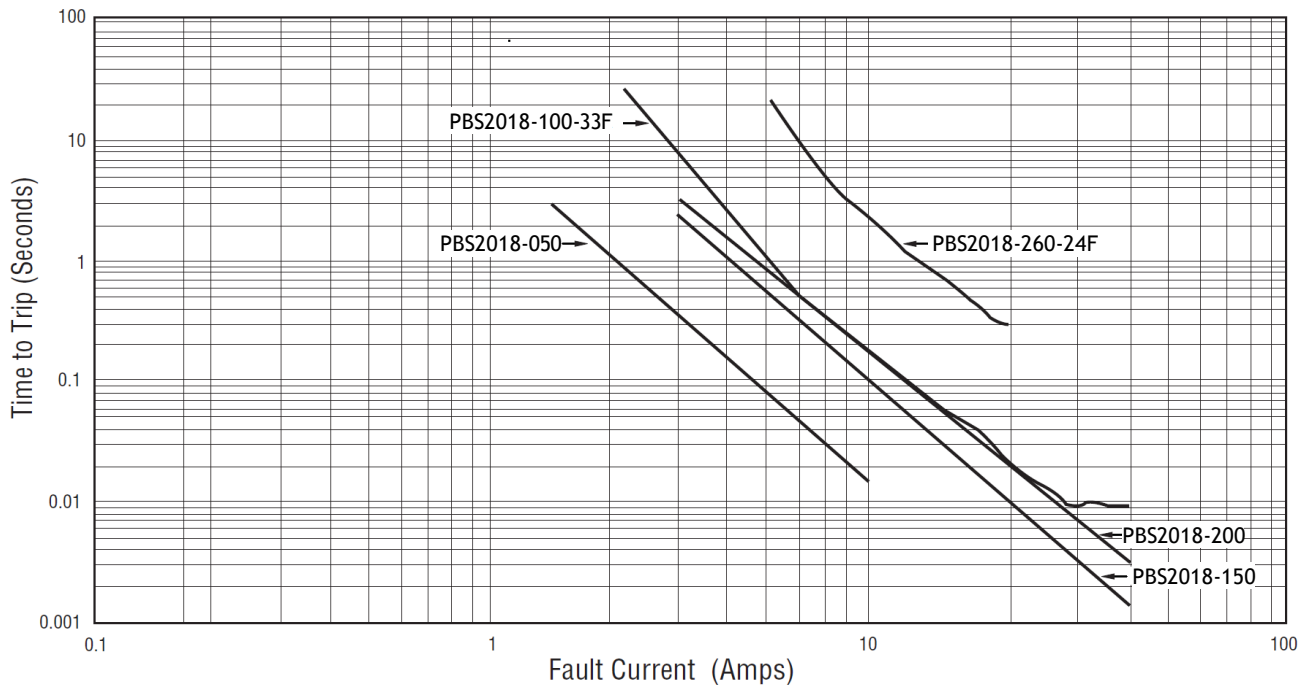


Recommended Foot Print Dimensions:

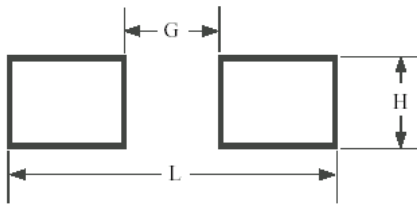


G (mm)	H (mm)	L (mm)
3.15±0.1	4.90±0.1	6.35±0.1

Tape and Reel Specifications:

Dimensions (Tape)	PBS2018-050 PBS2018-150 PBS2018-200	PBS2018-100-33F	PBS2018-260-24F	Dimensions (Reel)	PBS2018 Series
W	16.0±0.3 (0.630±0.012)	16.0±0.3 (0.630±0.012)	16.0±0.3 (0.630±0.012)	A max.	185 (7.28)
P ₀	4.0±0.1 (0.157±0.004)	4.0±0.1 (0.157±0.004)	4.0±0.1 (0.157±0.004)	N min.	50 (1.97)
P ₁	8.0±0.1 (0.315±0.004)	8.0±0.1 (0.315±0.004)	8.0±0.1 (0.315±0.004)	W ₁	12.4+2.0/-0.0 (0.488+0.079/-0.0)
P ₂	2.0±0.05 (0.079±0.002)	2.0±0.05 (0.079±0.002)	2.0±0.05 (0.079±0.002)	W ₂ max.	18.4 (0.724)
A ₀	5.1±0.15 (0.201±0.006)	5.1±0.15 (0.201±0.006)	5.4±0.15 (0.213±0.006)		
B ₀	5.6±0.23 (0.220±0.009)	5.6±0.1 (0.220±0.004)	5.7±0.15 (0.234±0.006)		
B ₁ max.	12.1 (0.476)	12.1 (0.476)	12.1 (0.476)		
D ₀	1.5+0.1/-0.0 (0.059+0.004/-0.0)	1.5+0.1/-0.0 (0.059+0.004/-0.0)	1.5+0.1/-0.0 (0.059+0.004/-0.0)		
F	7.5±0.1 (0.295±0.004)	7.5±0.1 (0.295±0.004)	7.5±0.1 (0.295±0.004)		
E ₁	1.75±0.1 (0.069±0.004)	1.75±0.1 (0.069±0.004)	1.75±0.1 (0.069±0.004)		
E ₂ max.	14.25 (0.561)	14.25 (0.561)	14.25 (0.561)		
T max.	0.6 (0.024)	0.6 (0.024)	0.6 (0.024)		
T ₁ max.	0.1 (0.004)	0.1 (0.004)	0.1 (0.004)		
K ₀	1.0±0.15 (0.039±0.006)	1.1±0.1 (0.043±0.004)	2.15±0.15 (0.085±0.006)		

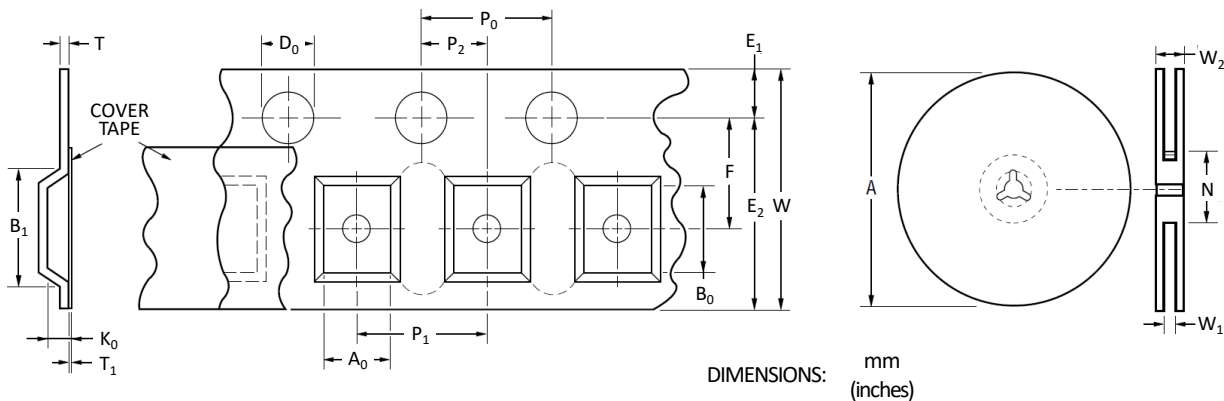

Recommended Reflow Soldering Profile:

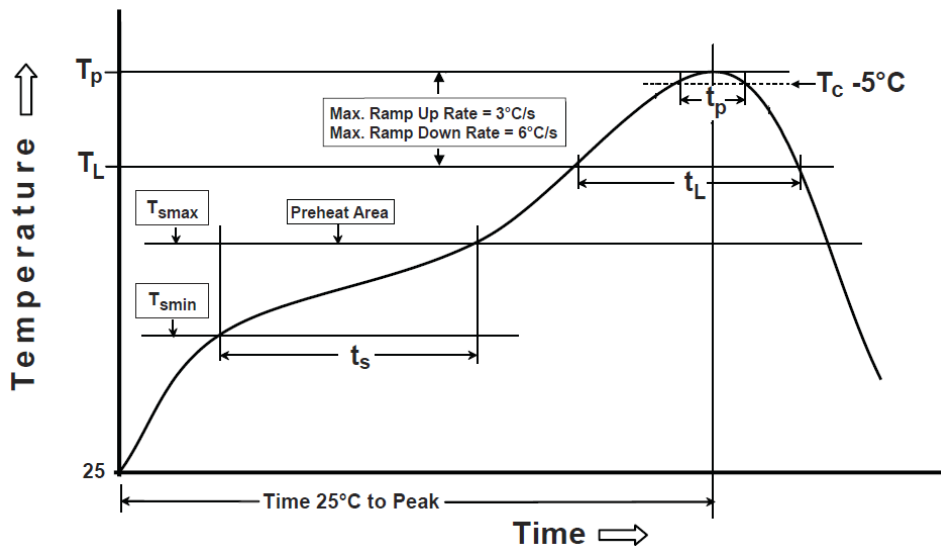

Profile Feature	Pb-Free Assembly
Preheat/Soak	
Temperature Min (T_{smin})	150°C
Temperature Max(T_{smax})	200°C
Time(t_s) from (T_{smin} to T_{smax})	60~120 seconds
Ramp-uprate (T_L to T_p)	3°C/second max.
Liquidous temperature(T_L)	217°C
Time(t_L) maintained above T_L	60~150 seconds
Peak package body temperature (T_p)	260°C
Time (t_p)*within 5°C of the specified classification temperature (T_c)	30 seconds *
Ramp-down rate (T_p to T_L)	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum	

Note:

- PBS2018 series cannot be wave soldered. Please contact AEM for hand soldering recommendations.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
- Compatible with Pb and Pb-free solder reflow profiles.
- Excess solder may cause a short circuit, especially during hand soldering.

Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame.

**WARNING:**

- Operation beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- The devices are intended for protection against occasional over-current or over-temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal and mechanical procedures for electronic components.
- Operation in circuit with a large inductance can generate a circuit voltage ($L di/dt$) above the rated voltage of the PPTC device.

Do not use this product in any Automotive Power train or Safety equipment such as ECU, ABS systems, or Battery Pack, Battery Management System, Battery Charger for Electric Vehicles and Plug-in Hybrid Vehicles. Only AEM products clearly described as "for Automotive Use" on its catalog can be used for automobile applications such as Power train and Safety equipment.